

SpeedoHealer

Supplementary Manual




Toyota 4Runner 2005 (SH-V4 + SH-U01)

Cut the Gray/Red wire behind the instrument cluster.


Connect the SH Green wire to the Gray/Red wire end at the speedometer side.

Connect the SH White wire to the Gray/Red wire end at the wiring harness side.

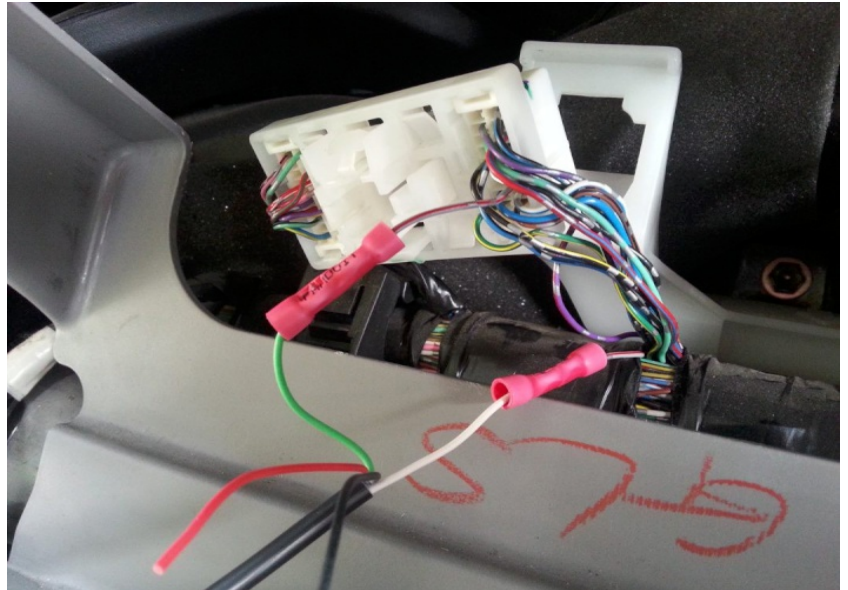

Connect the SH Black wire to chassis ground.

Connect the SH Red wire to a switched +12V power lead.

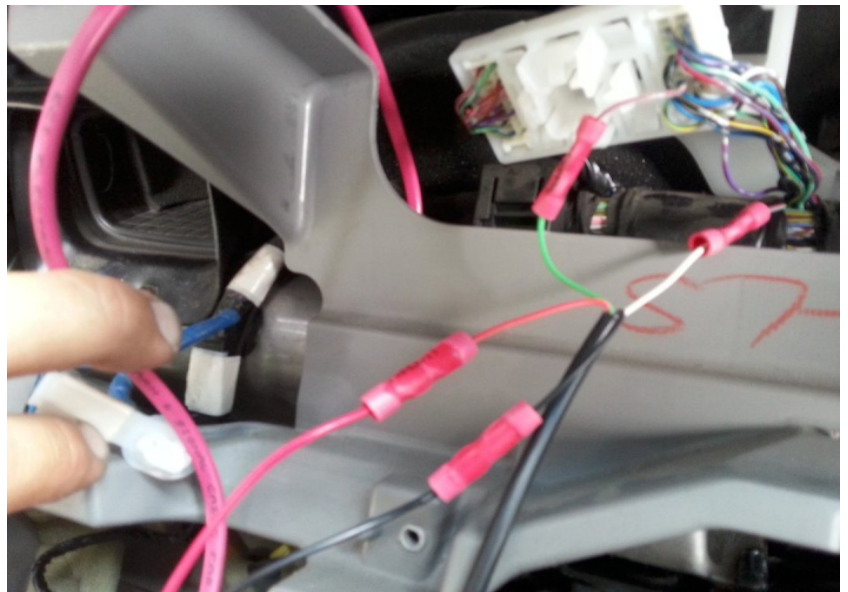

Speedometer is in sync with GPS after calibration.

