

# Brake Light Pro

## Supplementary Manual



### Ducati Hypermotard ABS TC 2019- (BLP-U01)

Secure the bike on a stand.



Remove the seat.



Locate the white 3-pole rear light assembly connector.



# Brake Light Pro

## Supplementary Manual



### Ducati Hypermotard ABS TC 2019- (BLP-U01)


Cut the Grey/Red wire.

Connect the BLP Green wire to the Grey/Red wire end, which goes to the rear light assembly connector.

Connect the BLP Red wire to the Grey/Red wire end, which goes to the bike's main wiring harness.



Connect the BLP Black wire to the Black wire.

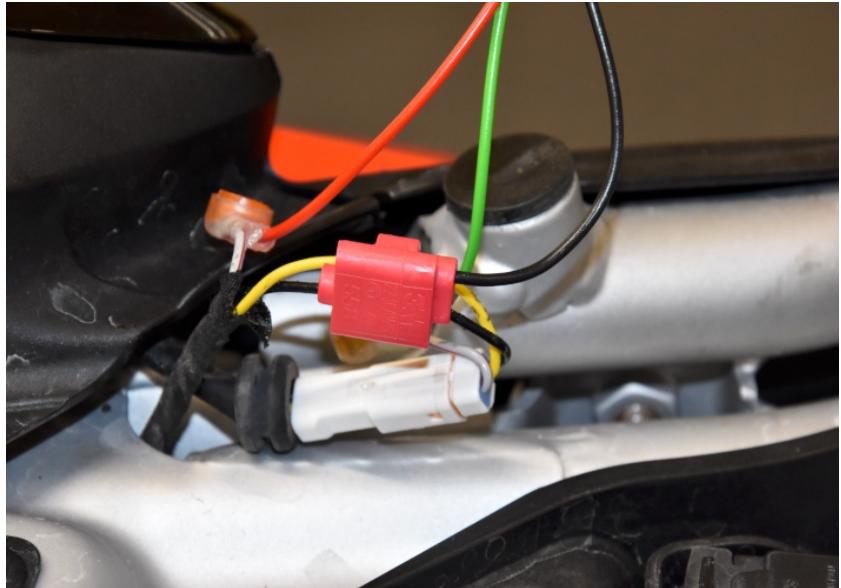

Typical position for the Brake Light Pro.

Secure the unit properly.

*Attention! If you wish to change the flashing mode, please connect the BLP Red wire directly to the positive terminal of the battery. After selecting the mode, connect the Red wire back to the rear light assembly connector.*

