

Brake Light Pro Supplementary Manual

Kawasaki Z300 ABS 2015-2016 (BLP-U01)

Secure the bike on a stand.




Remove the black plastic covers under the main seat.

Remove the seats.



Locate the transparent 3-pole rear light assembly connector under the main seat.

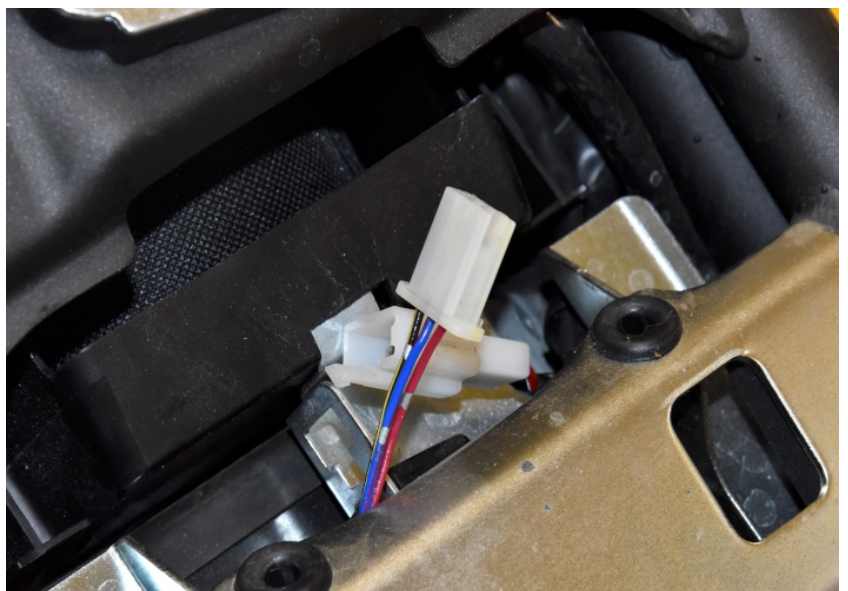


Brake Light Pro Supplementary Manual




Kawasaki Z300 ABS 2015-2016 (BLP-U01)


Place the bike's Black/Yellow wire inside the red wire tap run channel.

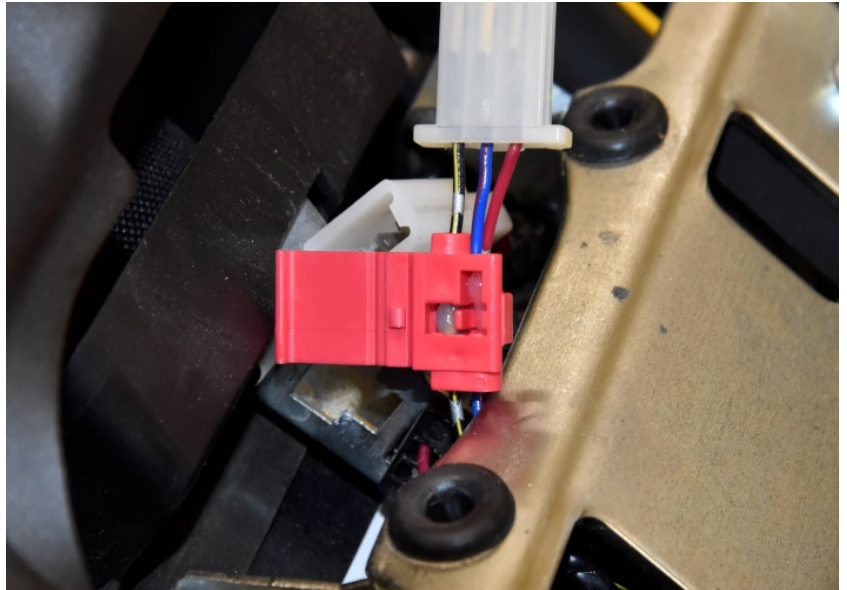

Close the side cover until latched.

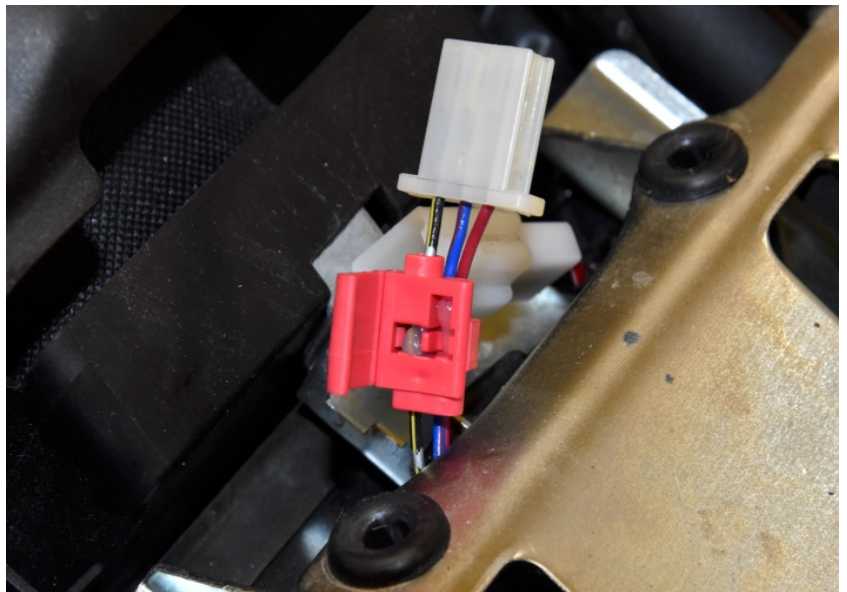


Insert the BLP Black wire completely into the red wire tap.

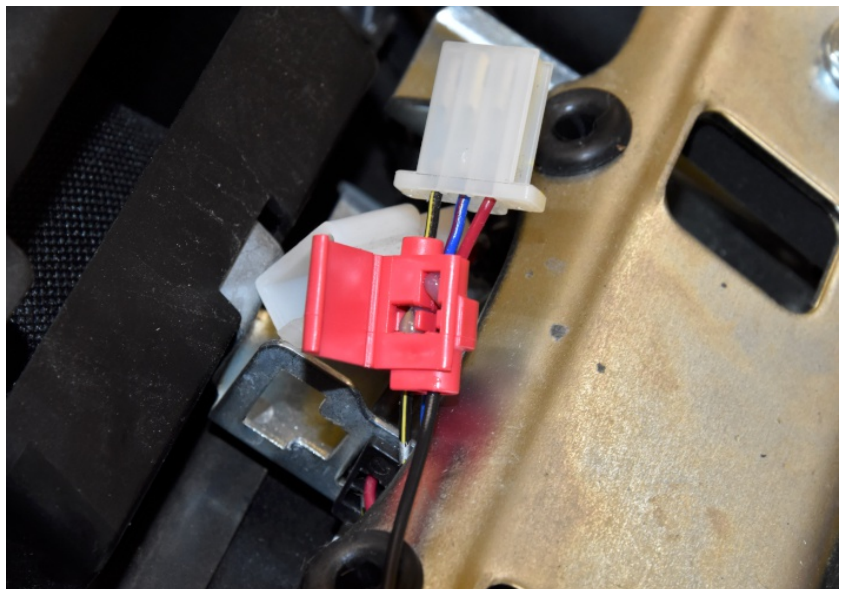

Kawasaki Z300 ABS 2015-2016 (BLP-U01)


Insert the blade (u-contact).

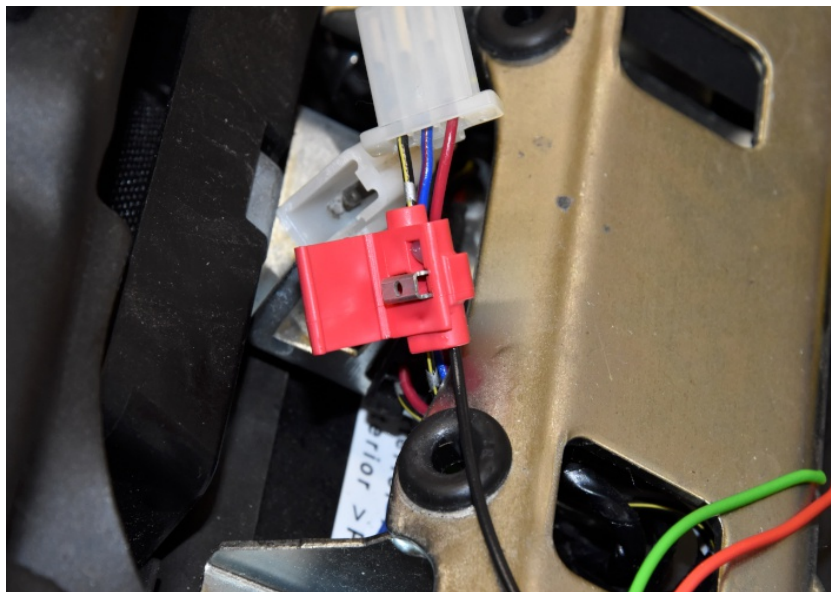

Press it down by finger pressure.



Depress the blade (u-contact) fully with pliers.

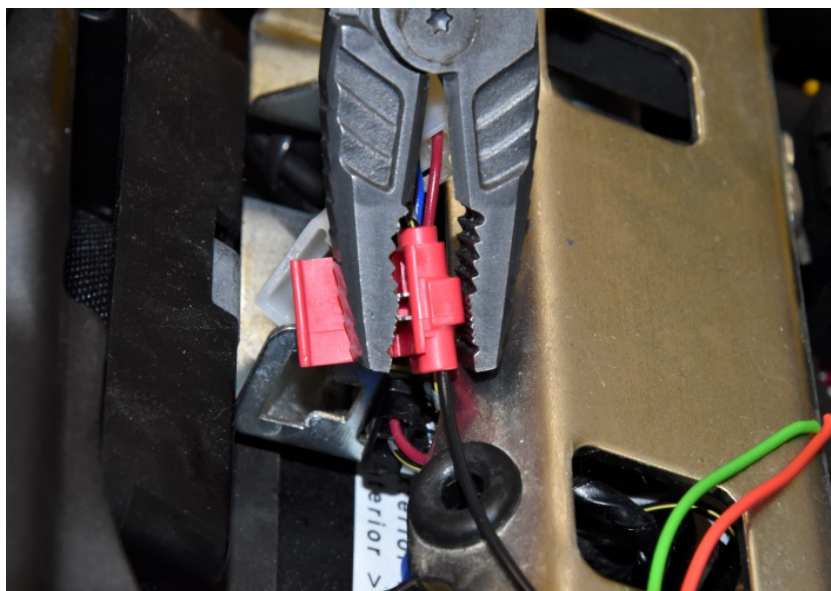


Brake Light Pro Supplementary Manual



Kawasaki Z300 ABS 2015-2016 (BLP-U01)


Close the hinged top cover until latched.

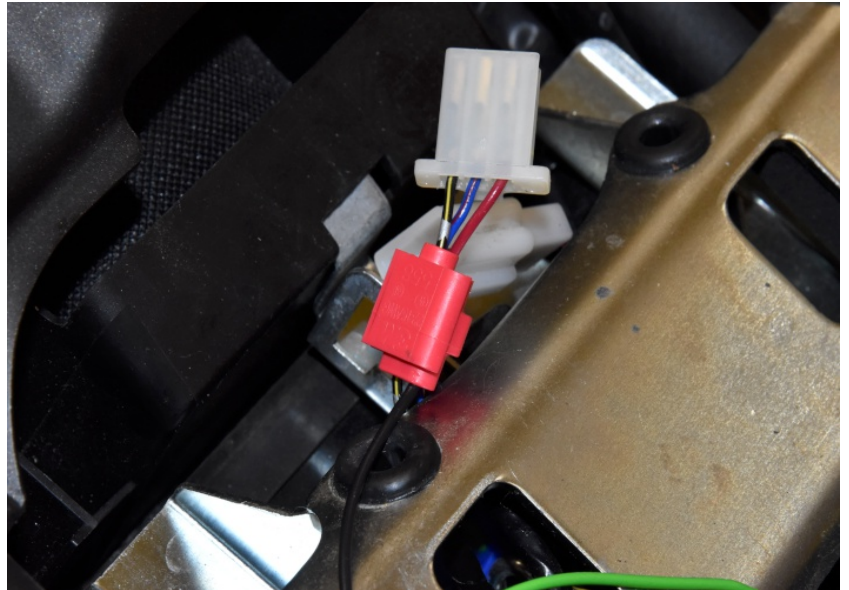

Cut the Blue/Red wire.

Connect the BLP Green wire to the Blue/Red wire end, which goes to the rear light assembly connector.

Connect the BLP Red wire to the Blue/Red wire end, which goes to the bike's main wiring harness.

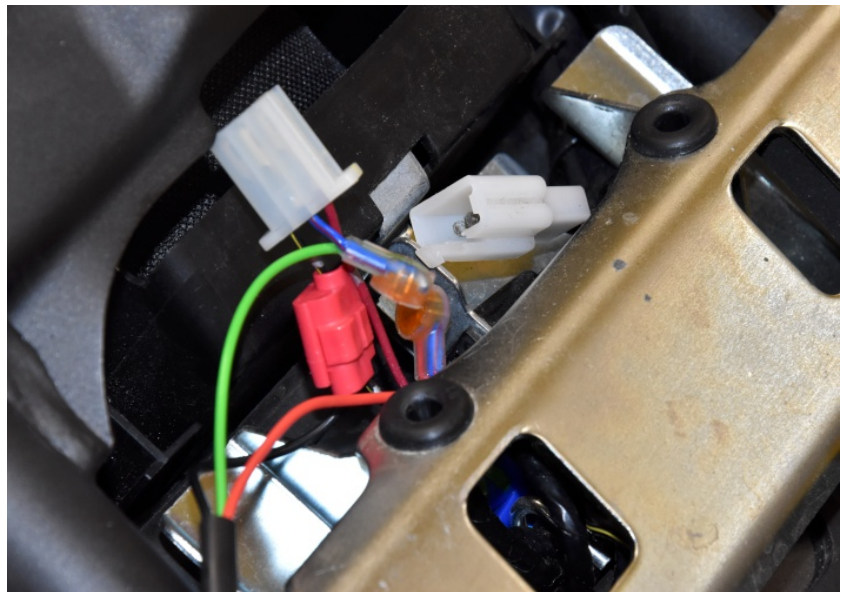

Typical position for the Brake Light Pro.

Secure the unit properly

