

Switchable Exhaust Servo Eliminator Supplementary Manual




Aprilia Tuono V4 ABS TC 2017-2020 (ESE-SW-A03)

Secure the bike on a stand.



Locate the exhaust servo motor on the right side.

Unplug the exhaust servo motor connectors.

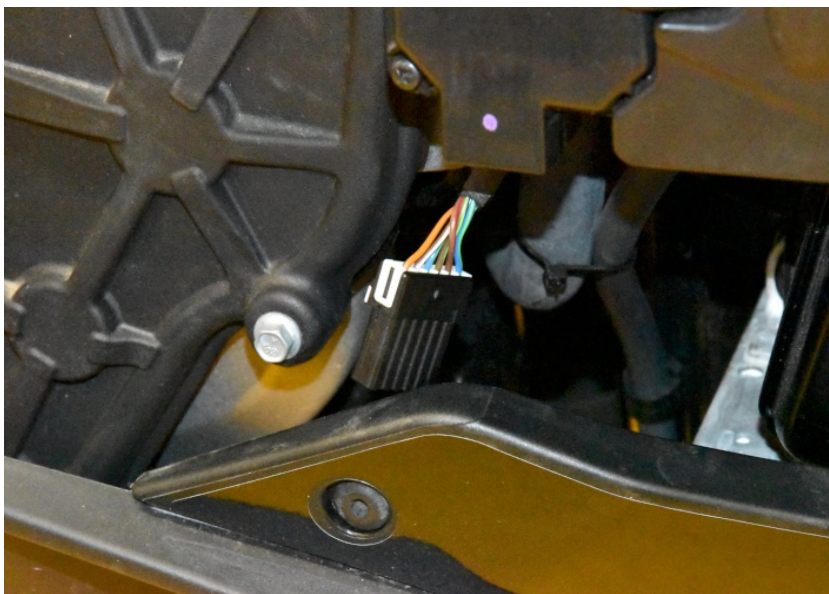

Plug the ESE-SW connectors in-line with the exhaust servo motor connectors.



Switchable Exhaust Servo Eliminator Supplementary Manual



Aprilia Tuono V4 ABS TC 2017-2020 (ESE-SW-A03)


Remove the seats.

Remove the plastic cover from the fuel tank.

Lift up the fuel tank.

Locate the ABS connector under the fuel tank on the right side.

Connect the ESE-SW Red wire to the Red/Brown wire of the ABS connector.

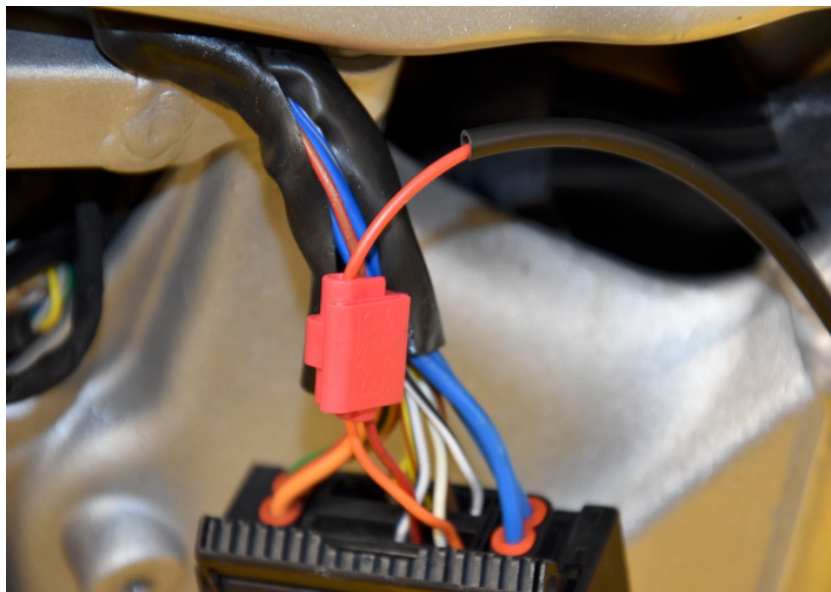

Mount the switch onto the handlebar.



Typical position of the Switchable Exhaust Servo Eliminator module.

Secure the unit properly.

