

# Switchable Exhaust Servo Eliminator Supplementary Manual



## Ducati Hypermotard ABS TC 2022- (ESE-SW-D01)

Secure the bike on a stand.




Remove the seat.



Locate the exhaust servo motor.

Unplug the exhaust servo motor  
connectors.

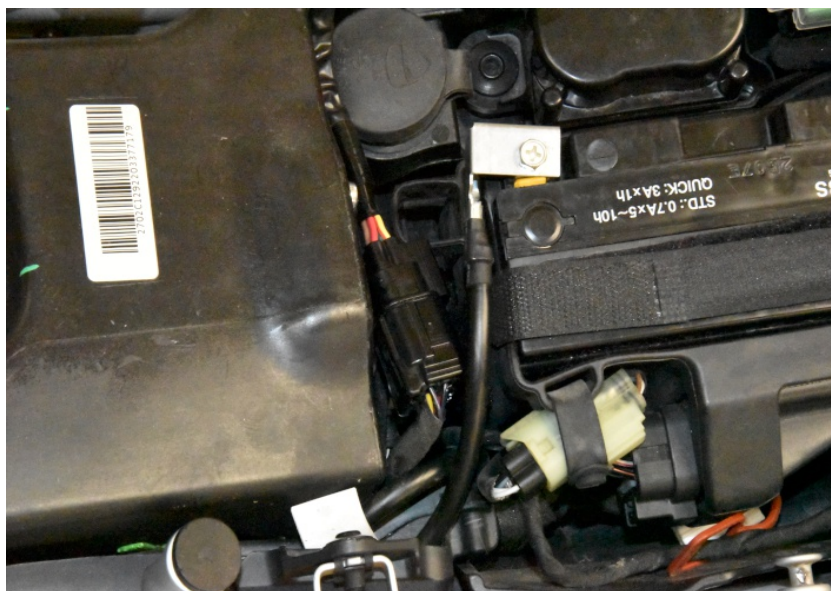

# Switchable Exhaust Servo Eliminator Supplementary Manual



## Ducati Hypermotard ABS TC 2022- (ESE-SW-D01)

Plug the ESE-SW connectors in-line with the exhaust servo motor connectors.



Connect the ESE-SW Red wire to the Red/Black wire of the fuse box.



Mount the switch onto the handlebar.



# Switchable Exhaust Servo Eliminator Supplementary Manual



## Ducati Hypermotard ABS TC 2022- (ESE-SW-D01)

Typical position of the Switchable Exhaust Servo Eliminator module.

Secure the unit properly.

