

Switchable Exhaust Servo Eliminator Supplementary Manual




Kawasaki ZX-10R ABS TC 2011- (ESE-SW-K01)

Secure the bike on a stand.



Remove the seats and the tail fairing.

Locate the exhaust servo motor under the main seat.

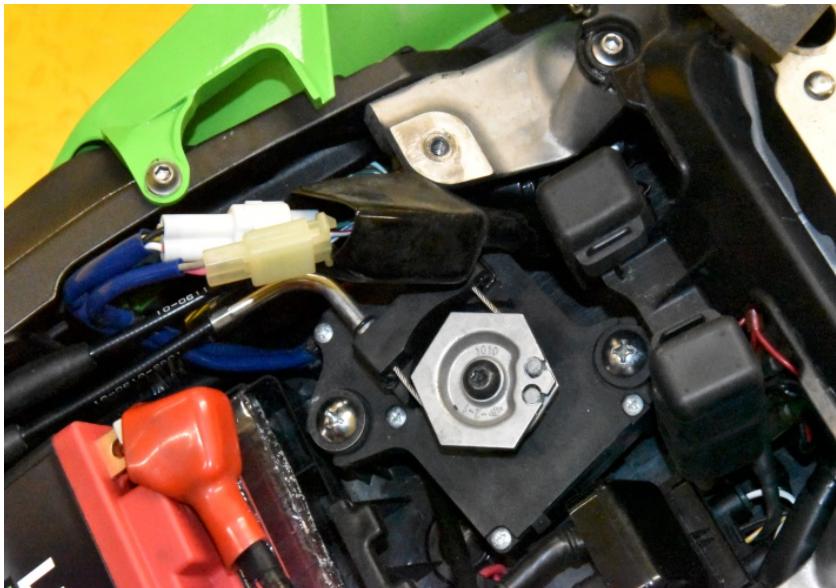

Unplug the exhaust servo motor connectors.

Plug the ESE-SW connectors in-line with the exhaust servo motor connectors.




Switchable Exhaust Servo Eliminator

Supplementary Manual




Kawasaki ZX-10R ABS TC 2011- (ESE-SW-K01)

Connect the ESE-SW Red wire to the Brown/White wire of the diagnostic connector.

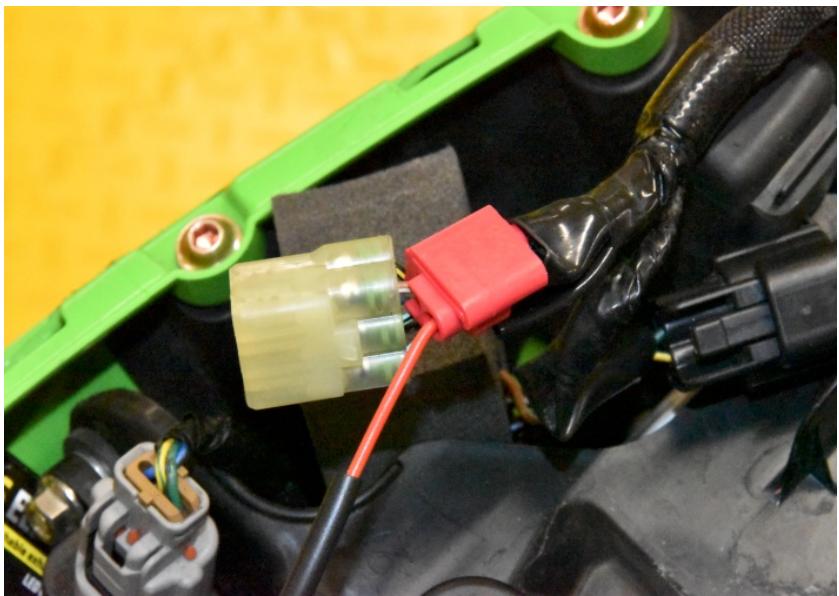

Mount the switch onto the handlebar.

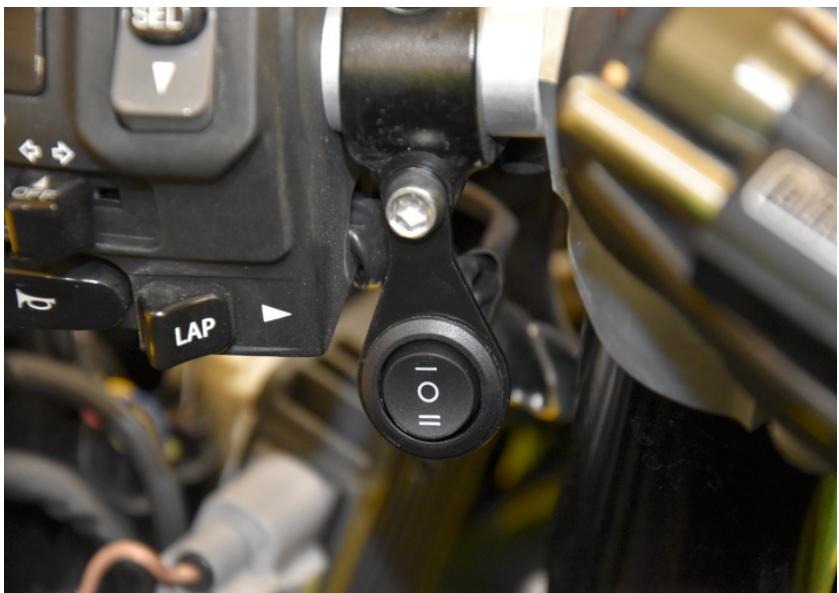

Typical position of the Switchable Exhaust Servo Eliminator module.

Secure the unit properly.

