

Switchable Exhaust Servo Eliminator Supplementary Manual



MV Agusta Dragster 800 RR ABS TC 2021- (ESE-SW-MV1)


Secure the bike on a stand.



Remove the left side fairing.

Remove the plastic cover from the
exhaust servo motor.

Locate and unplug the exhaust servo
motor connectors.

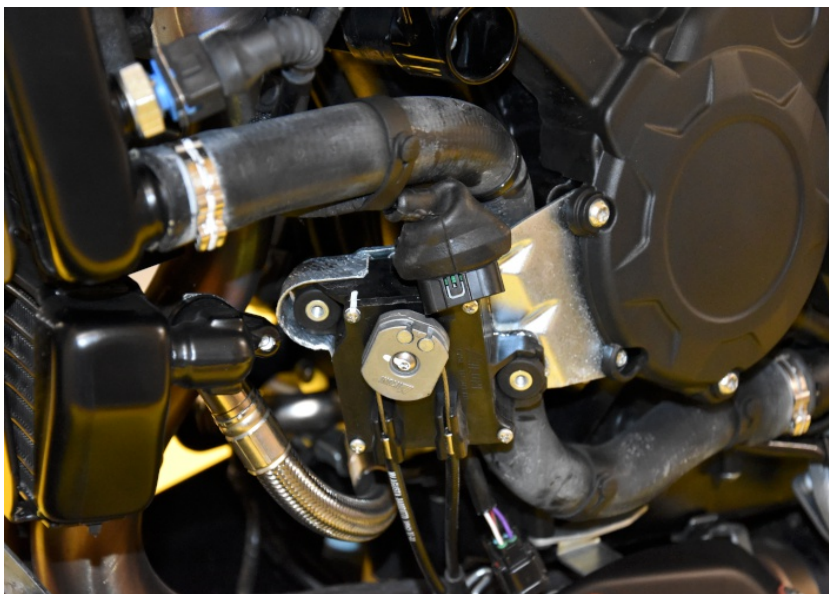

Plug the ESE-SW connectors in-line with
the exhaust servo motor connectors.




Switchable Exhaust Servo Eliminator Supplementary Manual



MV Agusta Dragster 800 RR ABS TC 2021- (ESE-SW-MV1)

Connect the ESE-SW Red wire to the White/Brown wire of the oxygen sensor connector.

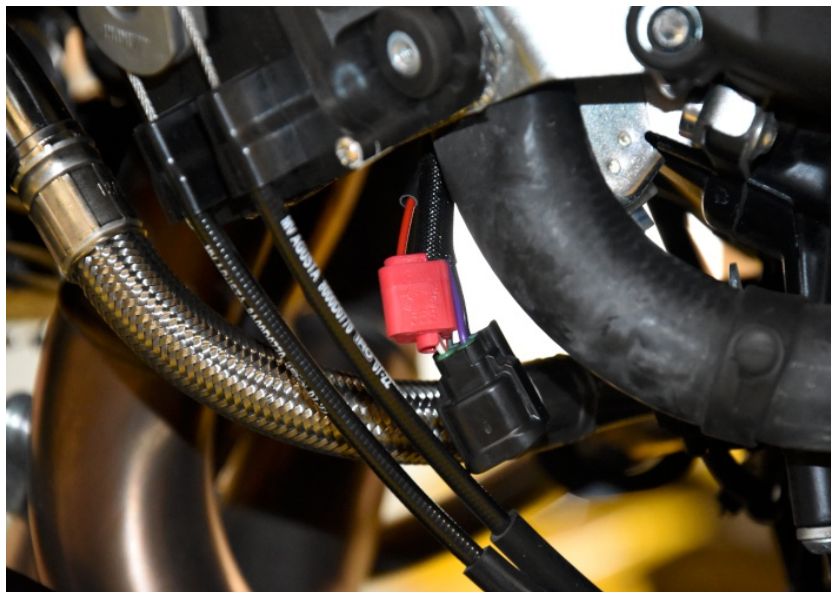

Mount the switch onto the handlebar.



Typical position of the Switchable Exhaust Servo Eliminator module.

Secure the unit with the supplied Velcro strips and cable ties properly to a solid part of the bike, making sure to keep the module as far as possible from the exhaust pipe and engine block.

