

Switchable Exhaust Servo Eliminator Supplementary Manual



MV Agusta F3 800 ABS TC 2011- (ESE-SW-MV1)

Secure the bike on a stand.



Remove the left side fairing.

Locate the exhaust servo motor on the left side.

Unplug the exhaust servo motor connectors.



Plug the ESE-SW connectors in-line with the exhaust servo motor connectors.




Switchable Exhaust Servo Eliminator Supplementary Manual



MV Agusta F3 800 ABS TC 2011- (ESE-SW-MV1)

Connect the ESE-SW Red wire to the Black/Green wire of the headlight connector.

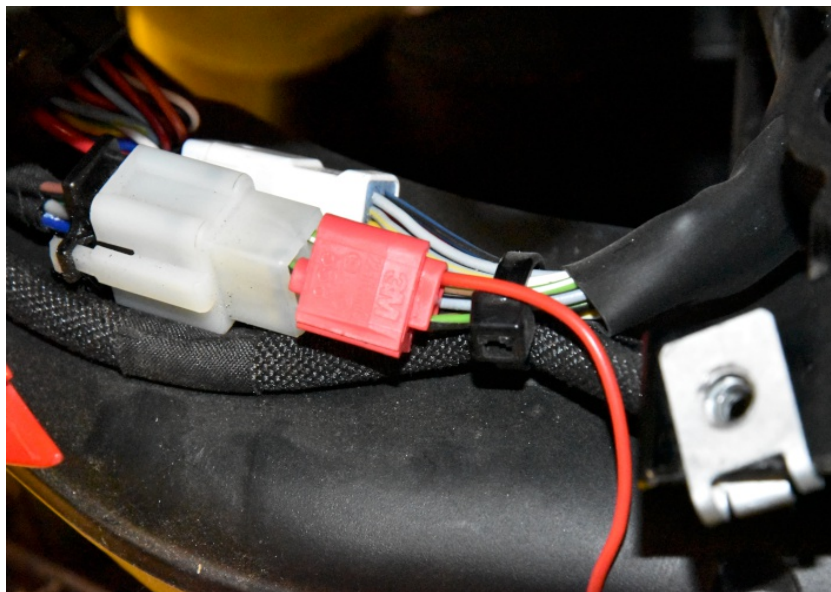

Mount the switch onto the handlebar.



Typical position of the Switchable Exhaust Servo Eliminator module.

Secure the unit properly.

