

FI Cleaner Tool

Supplementary Manual




Yamaha MT-10 SP ABS TC 2022- (FIC-KT2)

Secure the bike on a stand.



Remove the seat.

Locate the red 6-pole diagnostic connector.

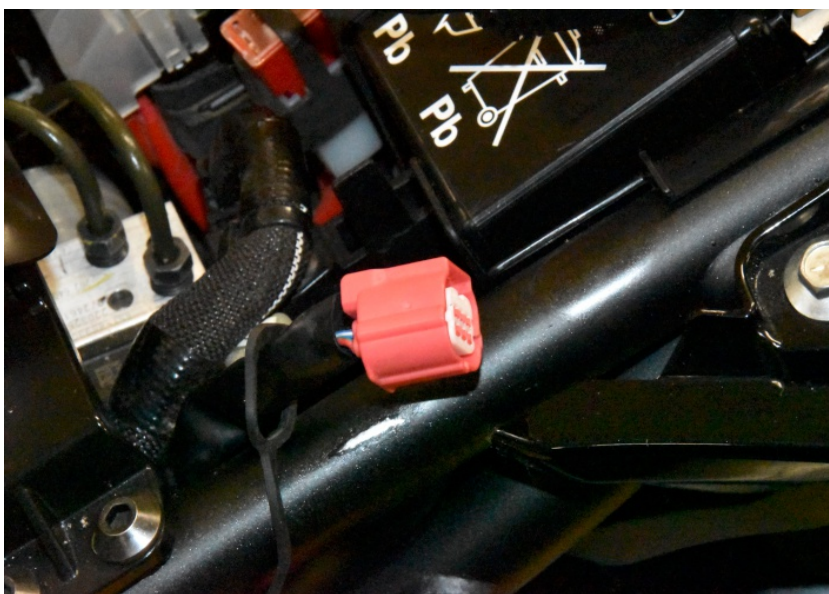

Plug the FI Cleaner Tool connector to the the diagnostic connector.

Turn the ignition key ON. The LED shows the current status of the maintenance.

