

GIPRO X-TYPE GEAR INDICATOR

Supplementary Manual



MV Agusta Brutale 1078 2008 (GPXT + GPX-D01)

Secure the bike on a stand.



Remove the seats and the side fuel tank covers.


Remove the ignition switch cover.

Remove the fuel tank.



Plug the GPX connectors in-line with the speed sensor connectors.

(Black, 3-pole connectors on the left side next to the side stand)

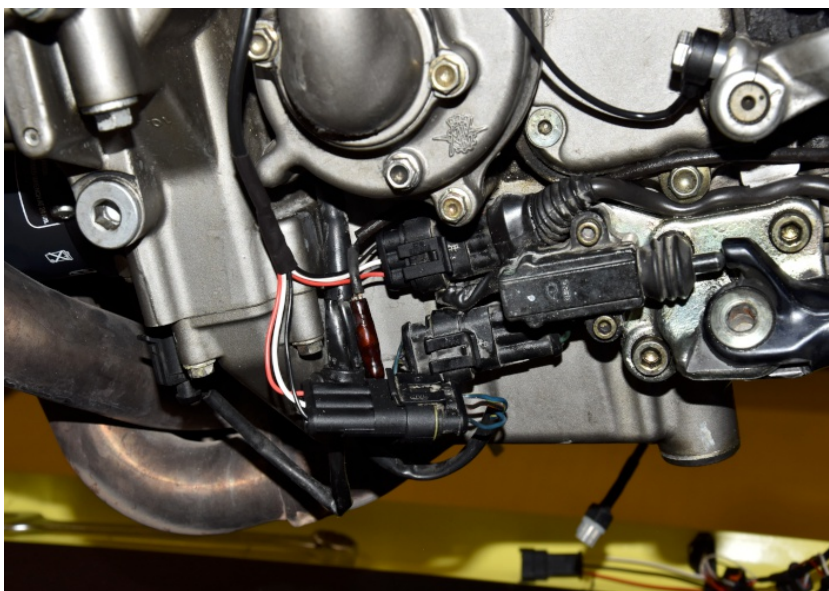


GIPRO X-TYPE GEAR INDICATOR

Supplementary Manual




MV Agusta Brutale 1078 2008 (GPXT + GPX-D01)

Connect the GPX Red wire to the Green/Red wire of the fuel pump connector.

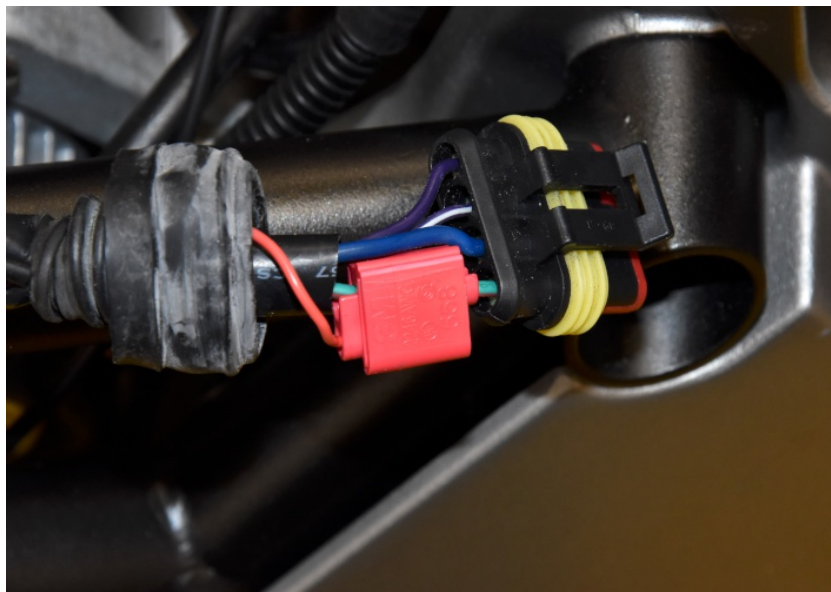

Connect the GPX Black/Green wire to the White wire of the crankshaft position sensor connector.

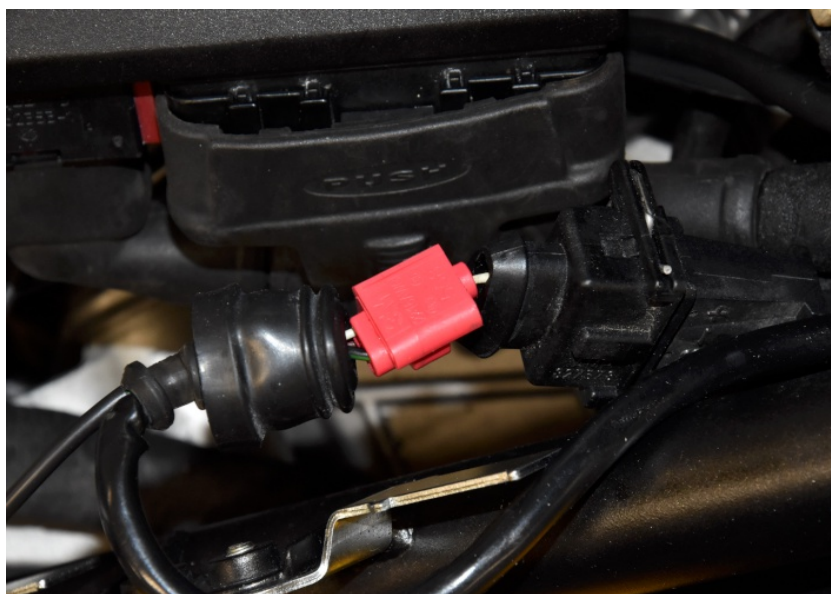

Typical position for the Gear Indicator.

Secure the unit properly.

