

GIPRO X-TYPE GEAR INDICATOR

Supplementary Manual



Honda MSX125 non-ABS 2013- (GPXT + GPX-H03)

Secure the bike on a stand.




Remove the seat.

Remove the side fairings.



Locate the vehicle speed sensor connectors.

(Transparent, 3-pole connectors and black, 1-pole connectors in a dust boot at the left side below the fuel tank)

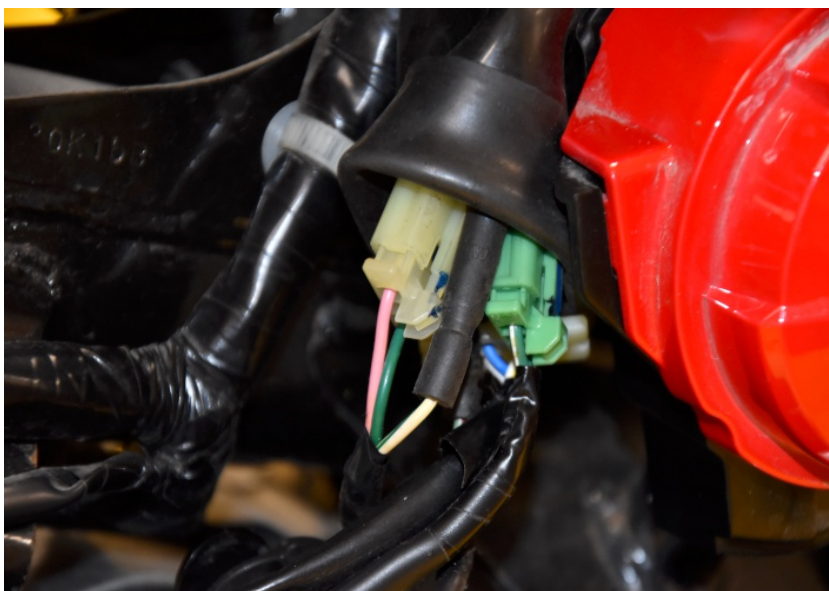


GIPRO X-TYPE GEAR INDICATOR

Supplementary Manual



Honda MSX125 non-ABS 2013- (GPXT + GPX-H03)

Plug the GPX connectors in-line with the speed sensor connectors.

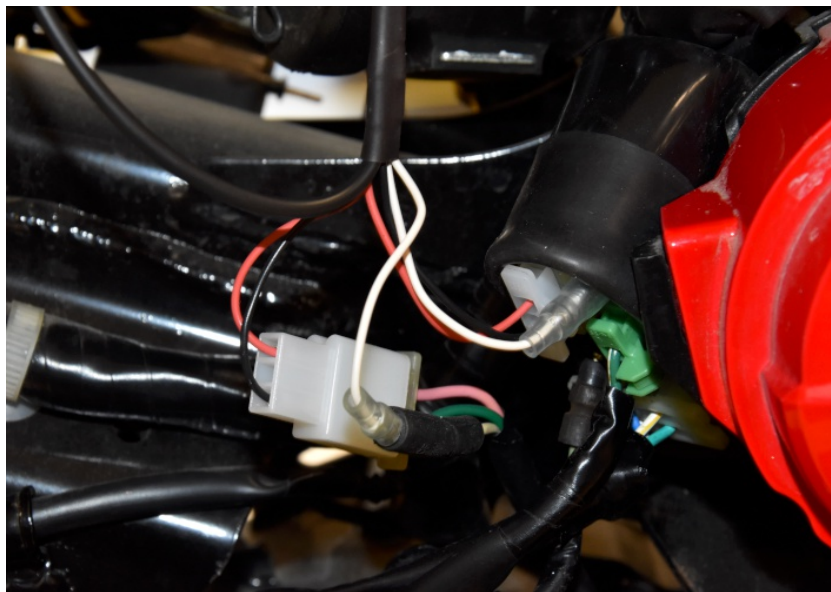

Connect the GPX Black/Green wire to the Yellow/Green wire of the ECM connector.



Typical position for the gear indicator.

Secure the unit properly.

(Shown with the optional Gipro Mount, part no.: GIPRO-M-BK)

