

GIPRO X-TYPE GEAR INDICATOR

Supplementary Manual



Honda NT650V Deauville 1998-2005 (GPXT + GPX-WSS)

Remove the seat.

Remove the black frame covers below the fuel tank.

Lift up or remove the fuel tank.




Mount the GPX-WSS sensor to the front or the rear wheel.

(Wheel speed sensor will be read the bolt heads of the rear brake disc or the bolt heads of the rear wheel sprocket. If rear wheel mount is not possible, you can also install the sensor at the front wheel.)



Connect the GPX Red wire to a switched +12V lead and connect the GPX Black wire to the ground lead.

(Example: parking light, transparent, 2-pole connector with Brown (switched +12V) and Green (gnd) wires)

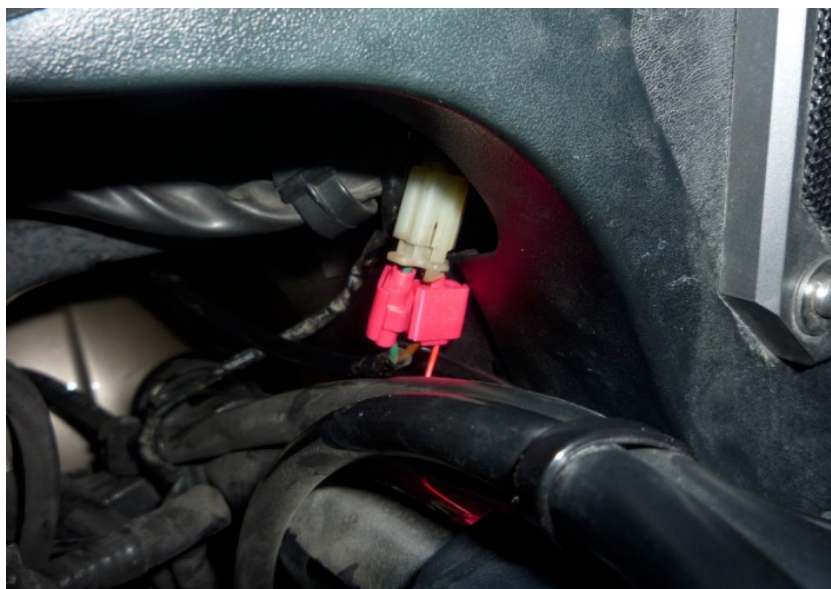

GIPRO X-TYPE GEAR INDICATOR

Supplementary Manual



Honda NT650V Deauville 1998-2005 (GPXT + GPX-WSS)

Connect the GPX Black/Green wire to the Yellow/Blue wire of the ignition transformer for the rear cylinder.

(Between the fuel tank and seat, near to the rear cylinder)

