

GIPRO X-TYPE GEAR INDICATOR

Supplementary Manual



Yamaha WR250X 2008-2013 (GPXT + GPX-Y01)

Remove the seat.

Remove the frame covers under the seat.



Remove the side fairings.



Plug the GPX connectors in-line with the speed sensor connectors.

(White, 3-pole triangular connectors at the left side near the frame)



GIPRO X-TYPE GEAR INDICATOR


Supplementary Manual



Yamaha WR250X 2008-2013 (GPXT + GPX-Y01)


Connect the GPX Black/Green wire to the Orange wire of the ECU/ECM.

(Black connector, PIN #17, below the seat)

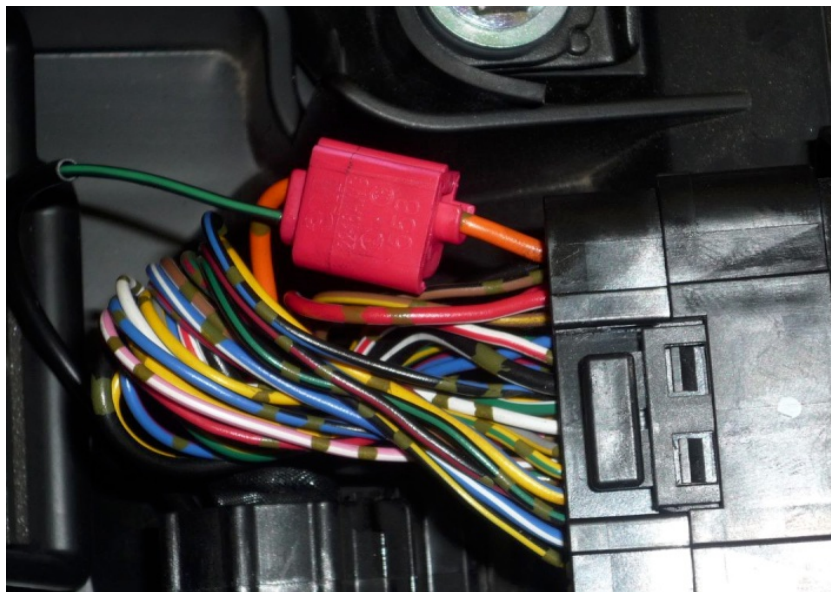

Connect the GPX Red wire to the Brown wire of the rear brakelight switch connector.

(White, 2-pole connector at the left side near the frame)

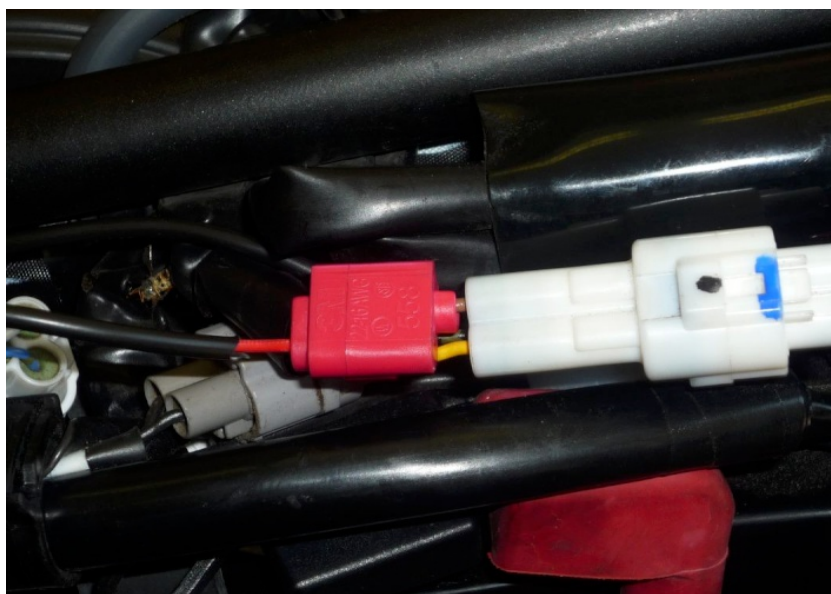

Typical position for the gear indicator.

Secure the unit properly.

