

GIPRO X-TYPE GEAR INDICATOR

Supplementary Manual



Yamaha XJ6N non-ABS 2009-2012 (GPXT + GPX-Y01)

Secure the bike on a stand.



Remove the seat.

Lift up or remove the fuel tank.



Plug the GPX connectors in-line with the speed sensor connectors.

(White, 3-pole triangular connectors in dust boot below the fuel tank)



GIPRO X-TYPE GEAR INDICATOR

Supplementary Manual



Yamaha XJ6N non-ABS 2009-2012 (GPXT + GPX-Y01)


Connect the GPX Black/Green wire to the Gray wire of the crankshaft position sensor connector.

(Transparent, 2-pole connector below the fuel tank)



Connect the GPX Red wire to the Brown wire of the rear brakelight switch connector.

(White, 2-pole connector in dust boot below the fuel tank)

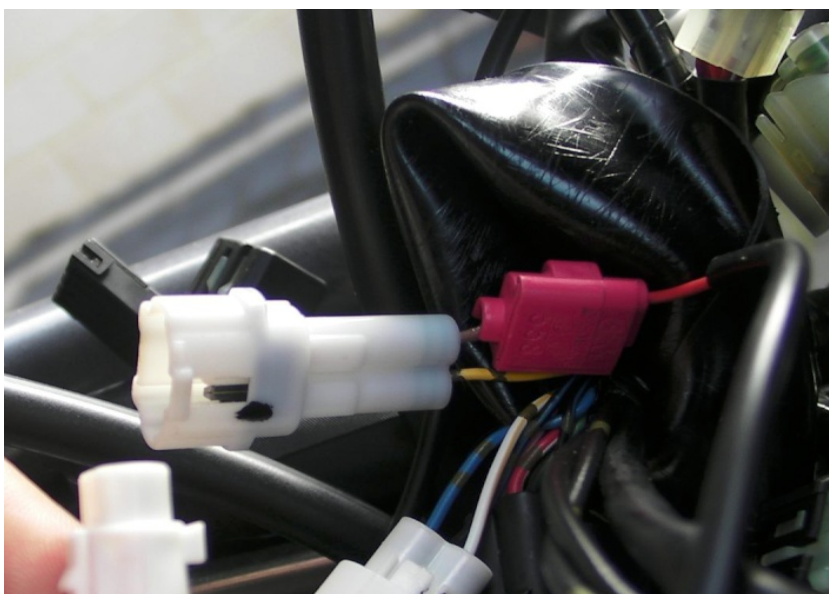

Typical position for the gear indicator.

Secure the unit properly.

