GIPRO X-TYPE GEAR INDICATOR

Supplementary Manual



Yamaha XVS1300 Midnight Star 2007-2016 (GPXT + GPX-Y01)

Remove the main seat.

Remove the battery cover.

Lift up or remove the fuel tank.



Remove the left side frame cover.



Plug the GPX connectors in-line with the speed sensor connectors.

(White, 3-pole triangular connectors near the battery)



GIPRO X-TYPE GEAR INDICATOR


Supplementary Manual



Yamaha XVS1300 Midnight Star 2007-2016 (GPXT + GPX-Y01)

Connect the GPX Black/Green wire to the Gray wire of the crankshaft position sensor connector.

(Transparent, 2-pole connector below the left side frame cover)

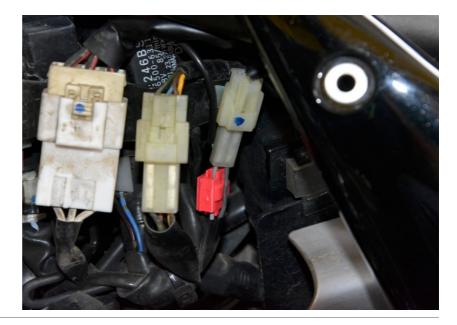

Connect the GPX Red wire to the Brown wire of the rear light connector.

(Transparent, 6-pole connector below the left side frame cover)



Typical position for the gear indicator.

Secure the unit properly.

