Ducati DesertX ABS TC 2022- (iQSE-1 + QSH-F1A)

Secure the bike on a stand.

Remove the seats.

Remove the windshield and the side fairings.

Remove the fuel tank.

Locate the fuel injector connector on the airbox.

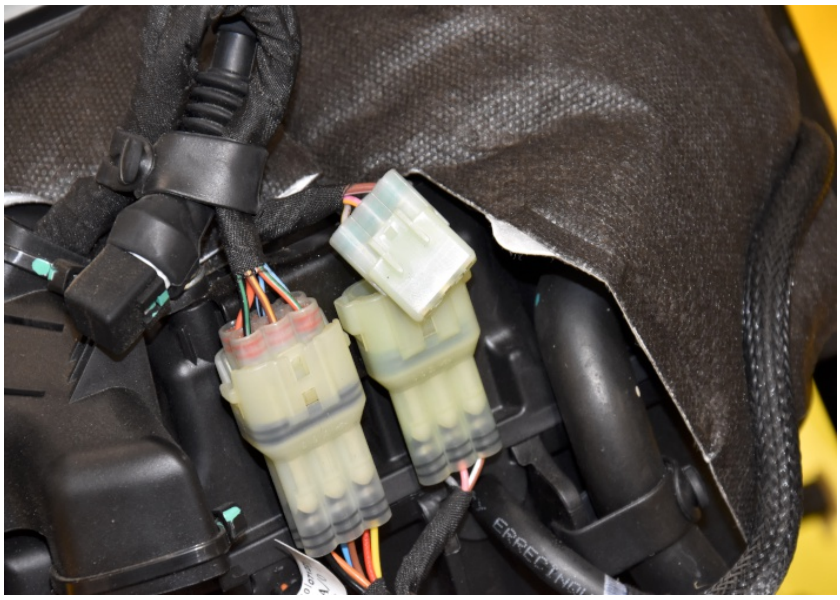

Ducati DesertX ABS TC 2022- (iQSE-1 + QSH-F1A)

Connect the QSH connectors in-line with the fuel injector connectors.

Connect the QSH Black wire terminal to the battery negative terminal.

Mount the QSE sensor.

(Replace the bolt with the one supplied. Place the conical washers at the two sides of the sensor like this: (O). Tighten the bolt in this position by about 6 Nm. If you do not have torque wrench, tighten the bolt until the shift arm is tight on the gearbox shaft.)

Ducati DesertX ABS TC 2022- (iQSE-1 + QSH-F1A)

Typical position for the QuickShifter easy.

Secure the unit properly.