



SUPPLEMENTARY MANUAL

for iQSE-1 + QSH-F2D

REMOVE THE
PASSENGER SEAT.



REMOVE THE
MAIN SEAT.



REMOVE THE
INJECTOR COVERS FROM
LEFT AND RIGHT SIDE.






SUPPLEMENTARY MANUAL

for iQSE-1 + QSH-F2D

REMOVE THE
FUEL TANK COVERS
FROM LEFT AND RIGHT SIDE.



CONNECT THE QSH CONNECTORS
IN-LINE WITH THE FUEL INJECTOR
CONNECTORS.
(BLACK, 2-POLE CONNECTORS)

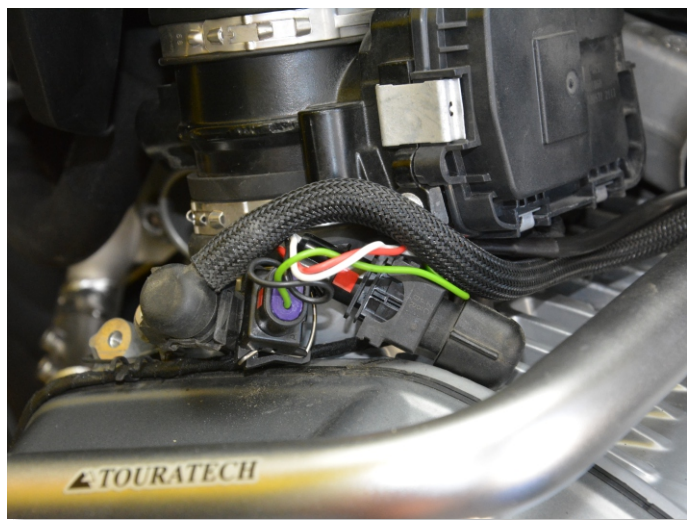

CONNECT THE QSH BLACK WIRE
TERMINAL TO THE BATTERY
NEGATIVE TERMINAL.





SUPPLEMENTARY MANUAL

for iQSE-1 + QSH-F2D

MOUNT THE QSE SENSOR.

(REPLACE THE BOLT WITH THE ONE SUPPLIED.
PLACE THE CONICAL WASHERS AT THE TWO SIDES OF
THE SENSOR LIKE THIS: (O).

TIGHTEN THE BOLT IN
THIS POSITION BY ABOUT 6 NM.

IF YOU DO NOT HAVE
A TORQUE WRENCH, TIGHTEN THE BOLT UNTIL THE
SHIFT ARM IS TIGHT ON THE GEARBOX SHAFT.

FOR DIFFERENT MOUNTING OPTIONS,
REFER TO THE SENSOR INSTALL GUIDE.)



TYPICAL POSITION FOR THE
QUICKSHIFTER EASY.

