

# QuickShifter easy Supplementary Manual



## MV Agusta Brutale 1078 2008 (iQSE-W1 + QSH-F4C)

Secure the bike on a stand.




Remove the seats and the side fuel tank covers.

Remove the ignition switch cover.

Remove the fuel tank.



Plug the QSH connectors in-line with the fuel injector connectors.

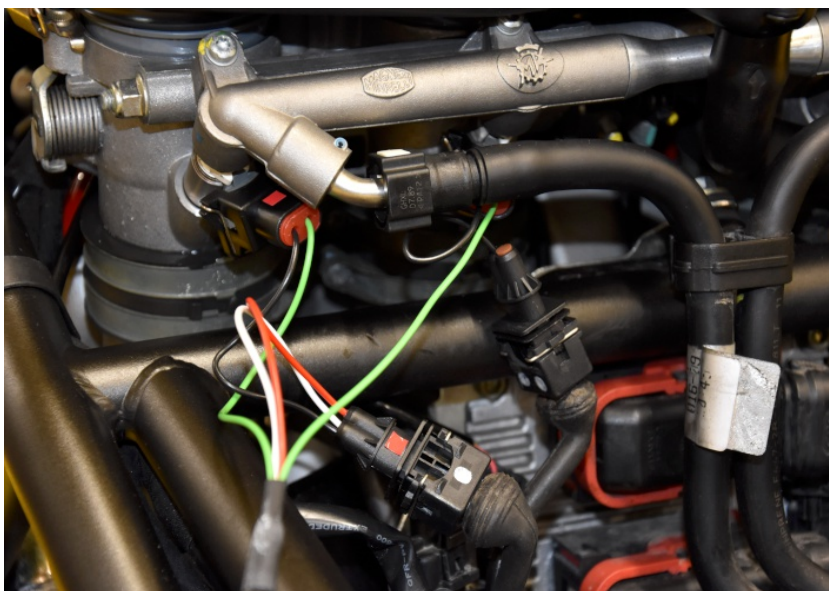


# QuickShifter easy Supplementary Manual



## MV Agusta Brutale 1078 2008 (iQSE-W1 + QSH-F4C)

Connect the QSH Black wire terminal to the battery negative terminal.

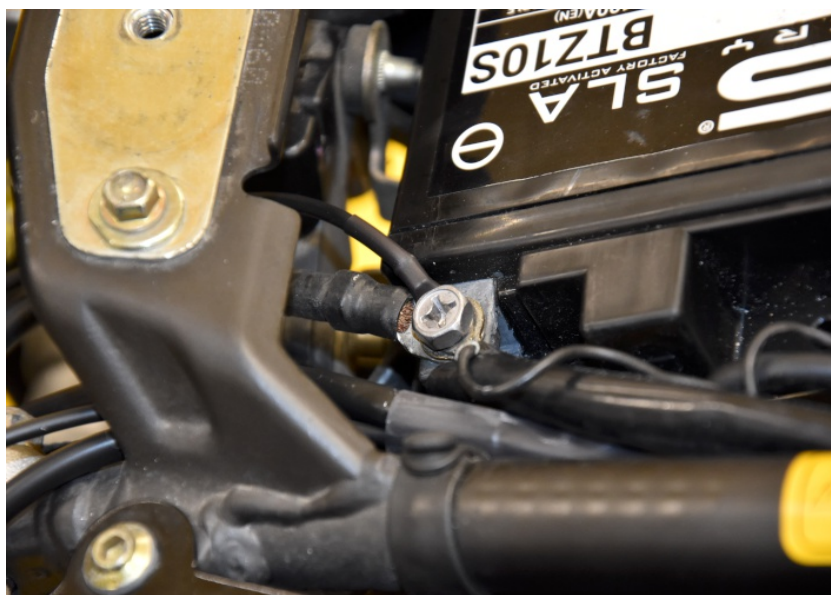

Mount the QSE sensor.

*(Replace the bolt with the one supplied.  
Place the supplied washers at both sides of the sensor. Tighten the bolt in this position by about 6 Nm. If you do not have torque wrench, tighten the bolt until the shift arm is tight on the gearbox shaft.)*



Typical position for the QuickShifter easy.

Secure the unit properly.

