

QuickShifter easy Supplementary Manual

MV Agusta Brutale 1078 2008 (iQSE-W1 + QSH-F4C)

Secure the bike on a stand.




Remove the seats and the side fuel tank covers.

Remove the ignition switch cover.

Remove the fuel tank.



Plug the QSH connectors in-line with the fuel injector connectors.

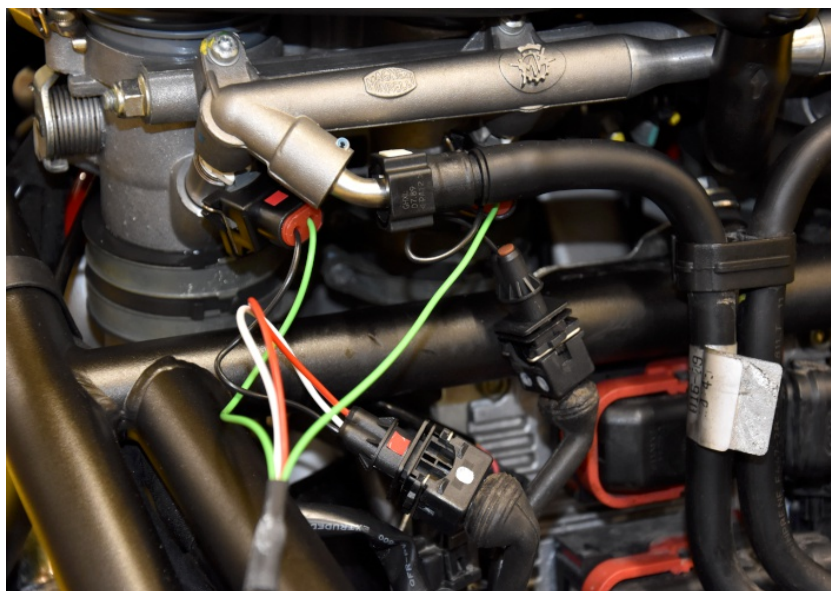


QuickShifter easy Supplementary Manual



MV Agusta Brutale 1078 2008 (iQSE-W1 + QSH-F4C)

Connect the QSH Black wire terminal to the battery negative terminal.

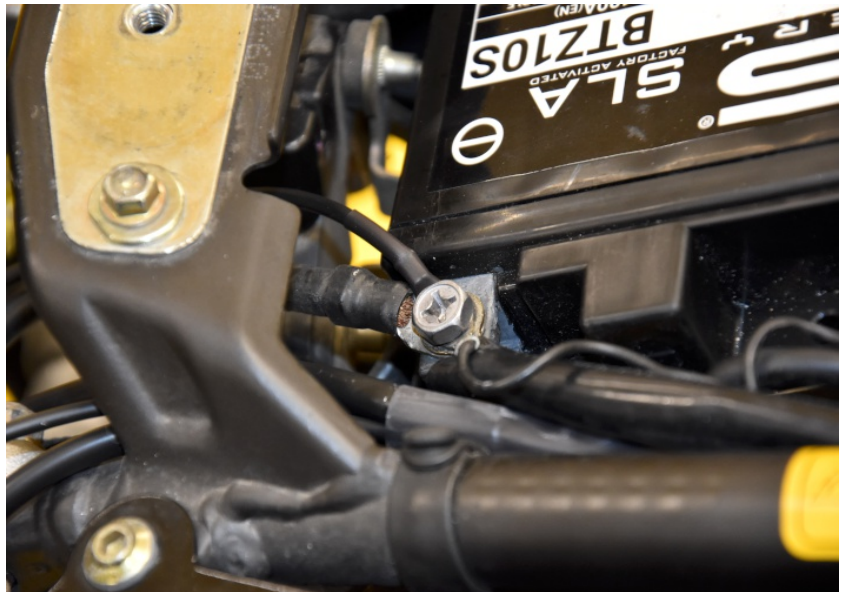

Mount the QSE sensor.

(Replace the bolt with the one supplied. Place the conical washers at the two sides of the sensor like this: (O). Tighten the bolt in this position by about 6 Nm. If you do not have torque wrench, tighten the bolt until the shift arm is tight on the gearbox shaft.)



Typical position for the QuickShifter easy.

Secure the unit properly.

