

# QuickShifter easy

## Supplementary Manual



**MV Agusta Brutale 910 Euro 2 spec 2005-2007 (iQSE-1 + QSH-F4D)**

Secure the bike on a stand.




Remove the seats and the side fuel tank covers.

Remove the ignition switch cover.

Remove the fuel tank.



Plug the QSH connectors in-line with the fuel injector connectors.

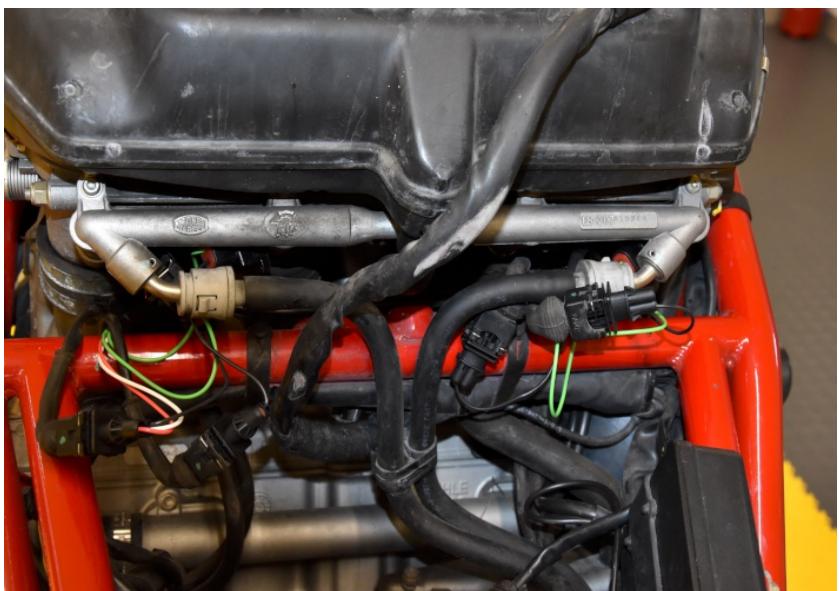

# QuickShifter easy

## Supplementary Manual



### MV Agusta Brutale 910 Euro 2 spec 2005-2007 (iQSE-1 + QSH-F4D)

Connect the QSH Black wire terminal to the battery negative terminal.

*(The picture on the right shows an alternative location, but we recommend using the battery negative terminal)*



Mount the QSE sensor.

*(Replace the bolt with the one supplied. Place the supplied washers at both sides of the sensor. Tighten the bolt in this position by about 6 Nm. If you do not have torque wrench, tighten the bolt until the shift arm is tight on the gearbox shaft.)*



Typical position for the QuickShifter easy.

Secure the unit properly.

