

QuickShifter easy Supplementary Manual



MV Agusta F4 1000 2004-2009 (iQSE-W1 + QSH-F4D)

Secure the bike on a stand.



Remove the seat.

Remove the fuel tank.



Plug the QSH connectors in-line with the
fuel injector connectors.



QuickShifter easy Supplementary Manual




MV Agusta F4 1000 2004-2009 (iQSE-W1 + QSH-F4D)

Connect the QSH Black wire terminal to the battery negative terminal.



Mount the QSE sensor.

*(Replace the bolt with the one supplied.
Place the supplied spacer under the sensor.
Tighten the bolt in this position by about 6 Nm. If you do not have torque wrench, tighten the bolt until the shift arm is tight on the gearbox shaft.)*

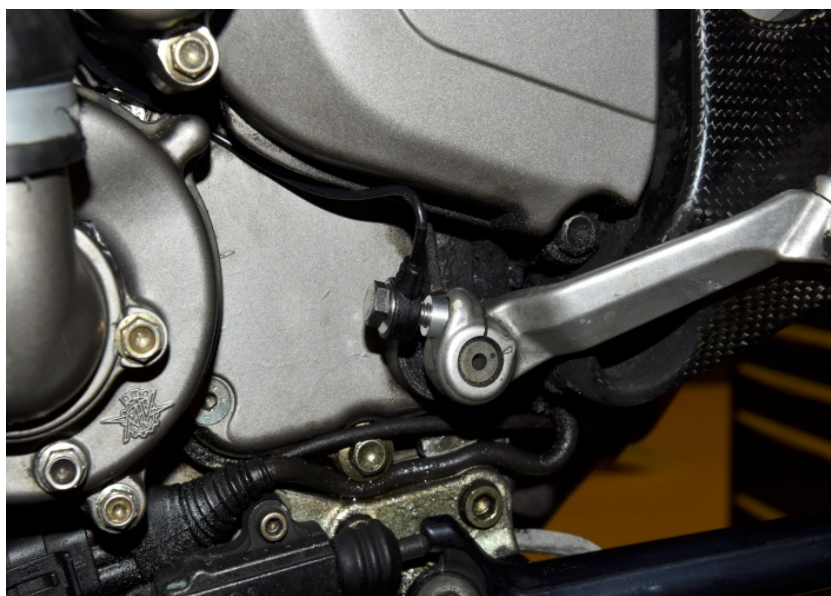

Typical position for the QuickShifter easy.

Secure the unit properly.

