

QuickShifter easy Supplementary Manual



Fantic Caballero 700 ABS TC 2024- (iQSE-W1 + QSH-P2A)

Secure the bike on a stand.




Remove the seat.

Remove the side plastic covers.



Plug the QSH connectors in-line with the
ignition coil connectors.

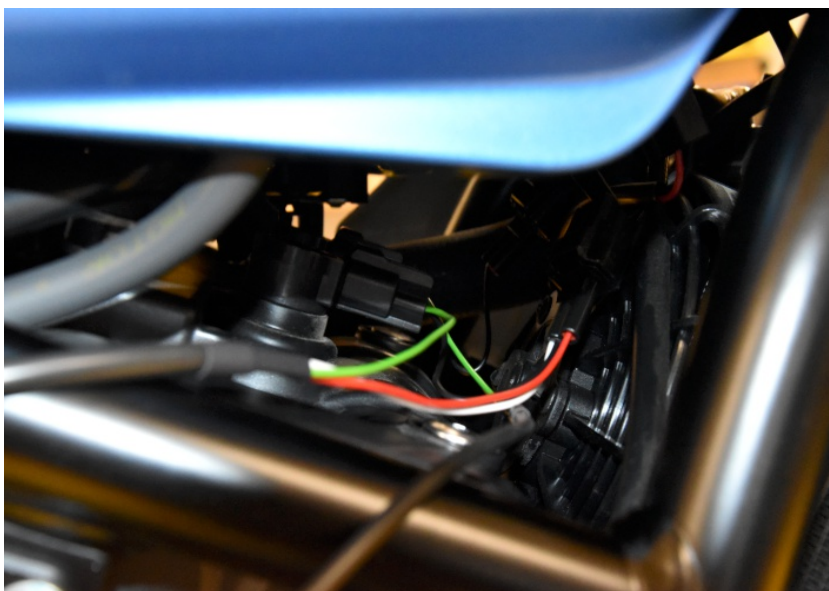

QuickShifter easy Supplementary Manual




Fantic Caballero 700 ABS TC 2024- (iQSE-W1 + QSH-P2A)

Connect the QSH Black wire terminal to the battery negative terminal.



Mount the QSE sensor.

*(Place the sensor in the rod as shown.
Tighten the nut by hand fully and then by a
1/4 turn using a wrench but maximum to
about 6 Nm.)*

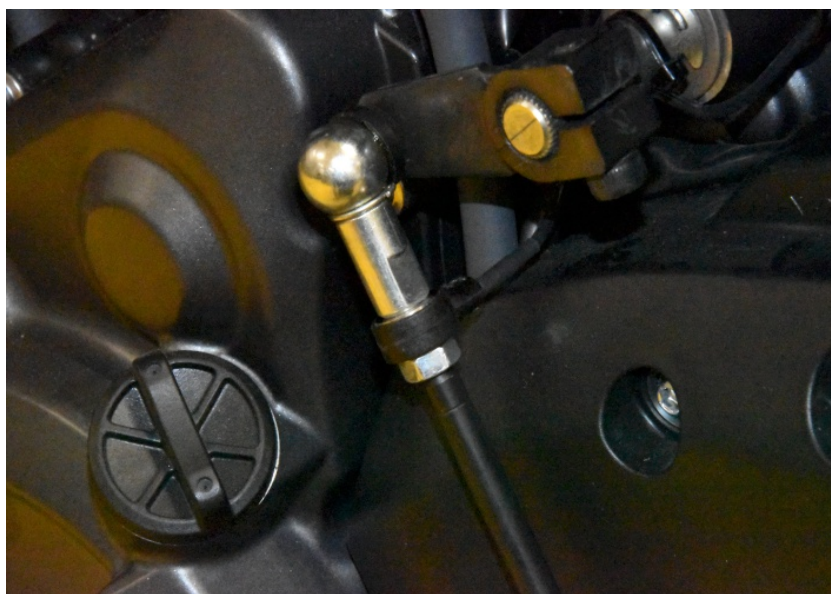

Typical position for the QuickShifter easy.

Secure the unit properly.

