


QuickShifter easy Supplementary Manual




Yamaha MT-07 2014- (iQSE-1 + QSH-P2A)

Remove the main seat and the fuel tank cover on the right side.

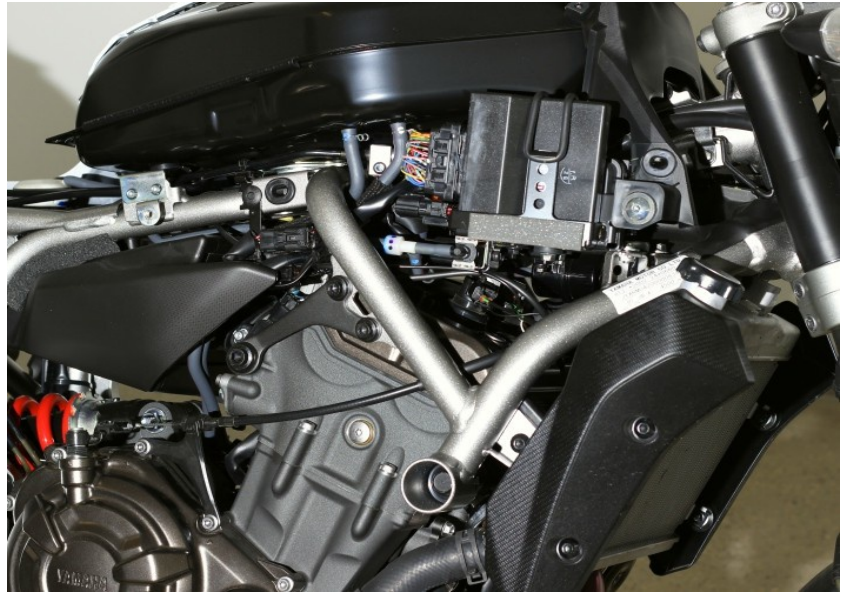

Plug the QSH connectors in-line with the ignition coil connectors.

(Black, 2-pole connectors below the fuel tank.)

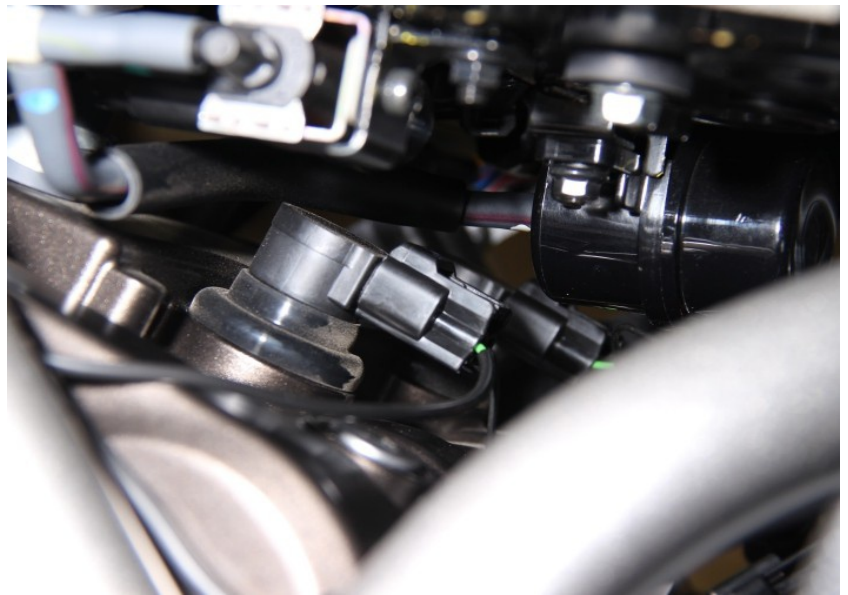

Mount the QSE sensor.

(Replace the bolt with the one supplied. Place the supplied washers at both sides of the sensor. Tighten the bolt in this position by about 6 Nm. If you do not have torque wrench, tighten the bolt until the shift arm is tight on the gearbox shaft.)




QuickShifter easy Supplementary Manual



Yamaha MT-07 2014- (iQSE-1 + QSH-P2A)

Connect the QSH Black wire terminal to the battery negative terminal

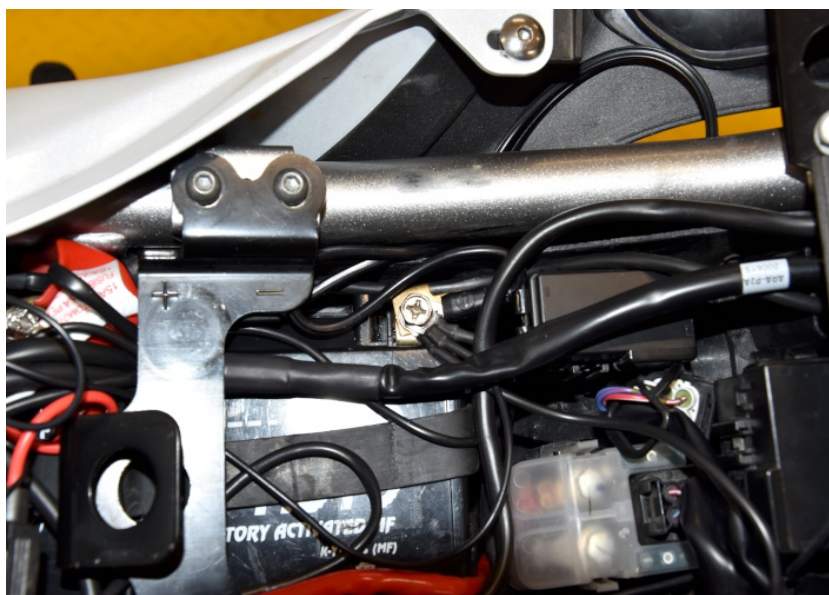

Typical position for the QuickShifter easy.

Secure the unit properly.

