


QuickShifter easy Supplementary Manual




Yamaha MT-07 2014- (iQSE-1 + QSH-P2A)

Remove the main seat and the fuel tank cover on the right side.

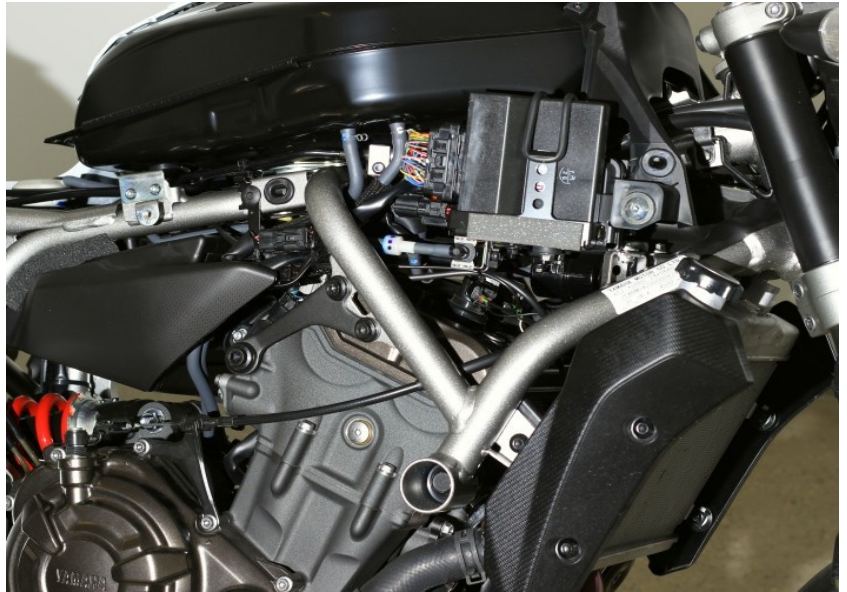

Plug the QSH connectors in-line with the ignition coil connectors.

(Black, 2-pole connectors below the fuel tank.)

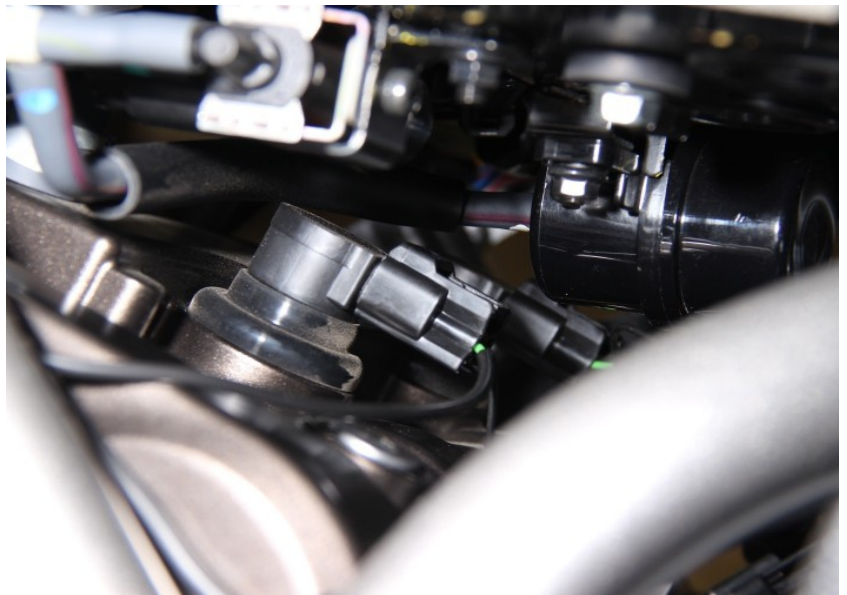

Mount the QSE sensor.

(Replace the bolt with the one supplied. Place the conical washers at the two sides of the sensor like this: (O). Tighten the bolt in this position by about 6 Nm. If you do not have torque wrench, tighten the bolt until the shift arm is tight on the gearbox shaft.)



QuickShifter easy Supplementary Manual



Yamaha MT-07 2014- (iQSE-1 + QSH-P2A)

Connect the QSH Black wire terminal to the battery negative terminal



Typical position for the QuickShifter easy.

Secure the unit properly.

