

QuickShifter easy Supplementary Manual



Yamaha Tracer 7 ABS 2021- (iQSE-1 + QSH-P2A)

Secure the bike on a stand.



Remove the seat.


Remove the the side fairings.

Remove the plastic covers from the fuel tank.

Remove the fuel tank.



Plug the QSH connectors in-line with the ignition coil connectors.

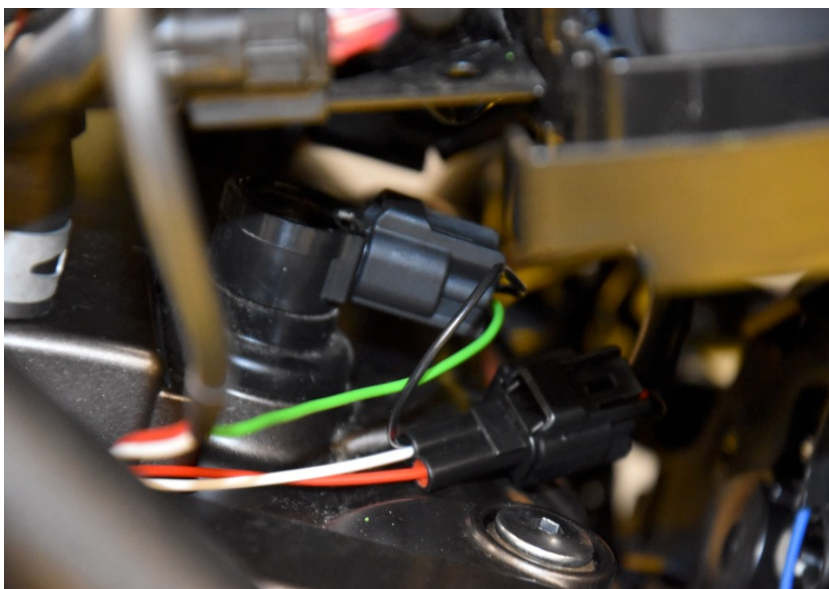


QuickShifter easy Supplementary Manual



Yamaha Tracer 7 ABS 2021- (iQSE-1 + QSH-P2A)

Connect the QSH Black wire terminal to the battery negative terminal.

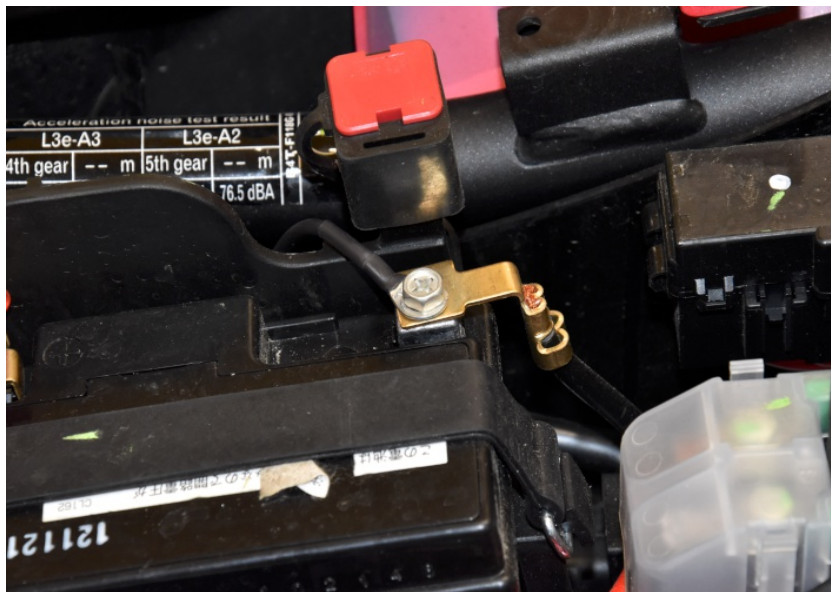

Mount the QSE sensor.

(Place the sensor in the rod as shown. Place the supplied washers at both sides of the sensor. Tighten the nut by hand fully and then by a 1/4 turn using a wrench but maximum to about 6 Nm.)



Typical position for the QuickShifter easy.

Secure the unit properly.

