


# QuickShifter easy Supplementary Manual



## Yamaha WR250X 2008-2015 (iQSE-1 + QSH-P2A)

Remove the main seat.

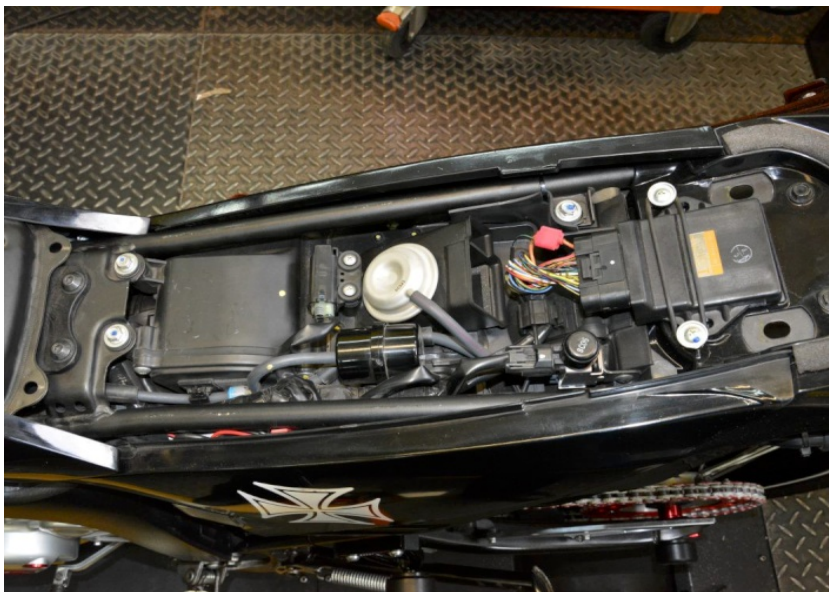

Remove the fuel tank covers.



Plug the QSH connector pair which is marked with a red square in-line with the ignition coil connector.

*(Black, 2-pole connector below the fuel tank)*




# QuickShifter easy Supplementary Manual



## Yamaha WR250X 2008-2015 (iQSE-1 + QSH-P2A)

Connect the QSH Black wire terminal to the chassis ground.

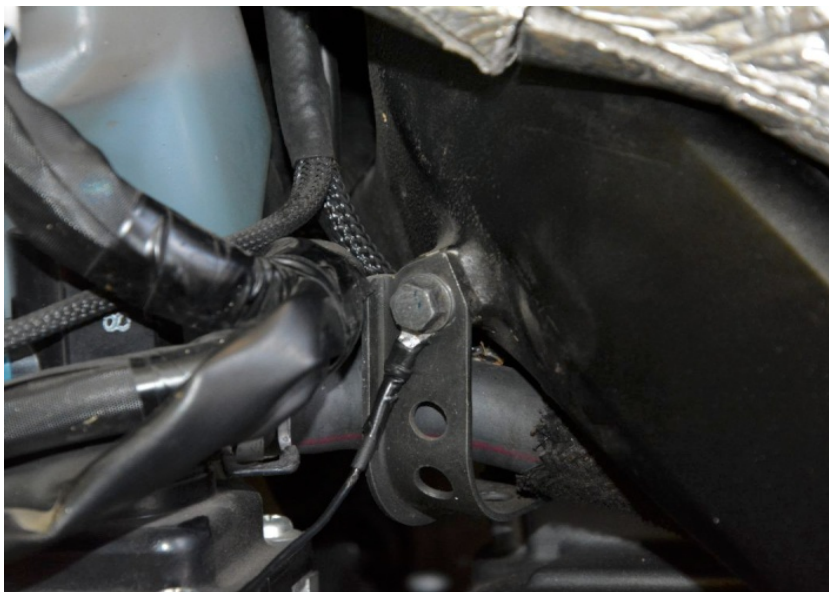

Mount the QSE sensor.

*(Replace the bolt with the one supplied.  
Place the conical washers at the two sides  
of the sensor like this: (O). Tighten the bolt  
in this position by about 6 Nm. If you do not  
have torque wrench, tighten the bolt until  
the shift arm is tight on the gearbox shaft.)*



Typical position for the QuickShifter easy.

Secure the unit properly.

