

QuickShifter easy Supplementary Manual



Yamaha WR250X 2008-2015 (iQSE-1 + QSH-P2A)

Remove the main seat.



Remove the fuel tank covers.



Plug the QSH connector pair which is marked with a red square in-line with the ignition coil connector.

(Black, 2-pole connector below the fuel tank)




QuickShifter easy Supplementary Manual



Yamaha WR250X 2008-2015 (iQSE-1 + QSH-P2A)

Connect the QSH Black wire terminal to the battery negative terminal.

(The picture on the right shows an alternative location, but we recommend using the battery negative terminal)

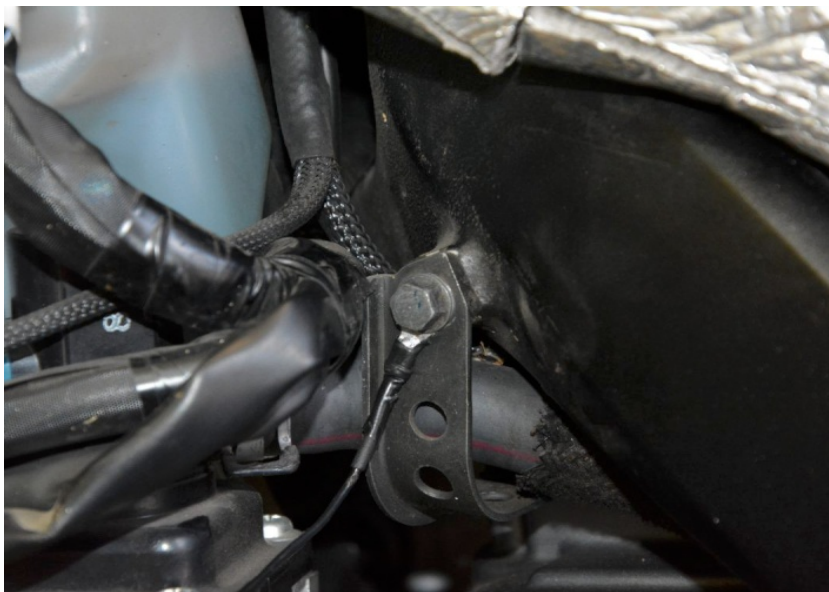

Mount the QSE sensor.

(Replace the bolt with the one supplied. Place the supplied washers at both sides of the sensor. Tighten the bolt in this position by about 6 Nm. If you do not have torque wrench, tighten the bolt until the shift arm is tight on the gearbox shaft.)



Typical position for the QuickShifter easy.

Secure the unit properly.

