

## Kawasaki ER-6N 2006-2008 (iQSE-1 + QSH-P2B)


Remove the seat.



Remove the tank covers.



Lift up or remove the fuel tank.

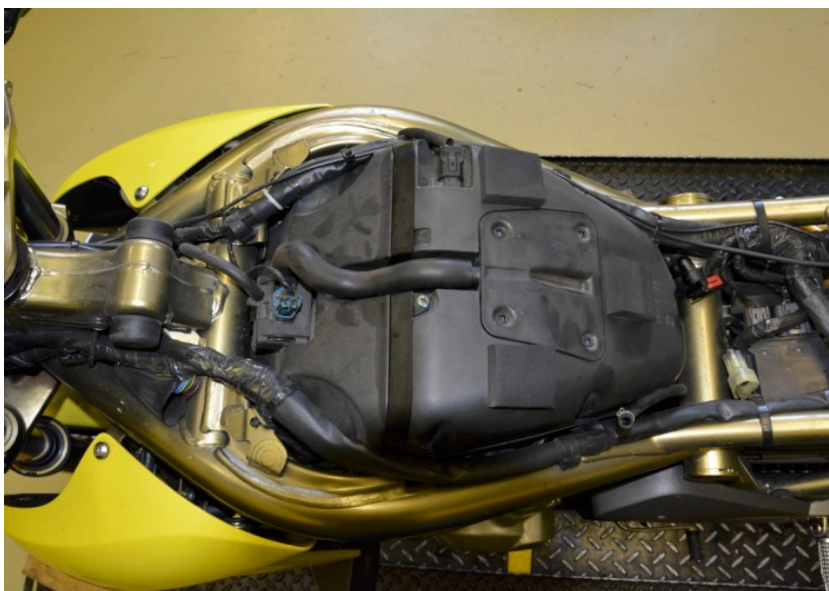

# QuickShifter easy Supplementary Manual



## Kawasaki ER-6N 2006-2008 (iQSE-1 + QSH-P2B)

Plug the QSH connectors in-line with the ignition coil connectors.

*(Black, 2-pole connectors below the airbox)*



Connect the QSH Black wire terminal to the battery negative terminal.

*(The picture on the right shows an alternative location, but we recommend using the battery negative terminal)*



Mount the QSE sensor.

*(Replace the bolt with the one supplied. Place the supplied washers at both sides of the sensor. Tighten the bolt in this position by about 6 Nm. If you do not have torque wrench, tighten the bolt until the shift arm is tight on the gearbox shaft.)*





# QuickShifter easy Supplementary Manual



## Kawasaki ER-6N 2006-2008 (iQSE-1 + QSH-P2B)

Typical position for the QuickShifter easy.

Secure the unit properly.

