

QuickShifter easy Supplementary Manual

Kawasaki Z300 ABS 2015-2016 (iQSE-1 + QSH-P2B)

Secure the bike on a stand.



Remove the black plastic covers under the main seat.


Remove the seats.

Remove the black covers from the fuel tank.

Remove the fuel tank.



Plug the QSH connectors in-line with the ignition coil connectors.

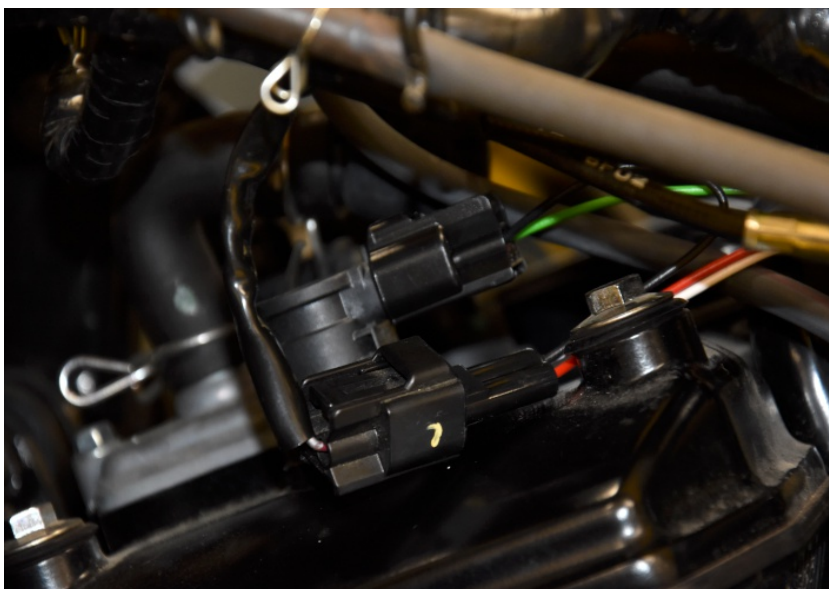


QuickShifter easy Supplementary Manual



Kawasaki Z300 ABS 2015-2016 (iQSE-1 + QSH-P2B)

Connect the QSH Black wire terminal to the battery negative terminal.

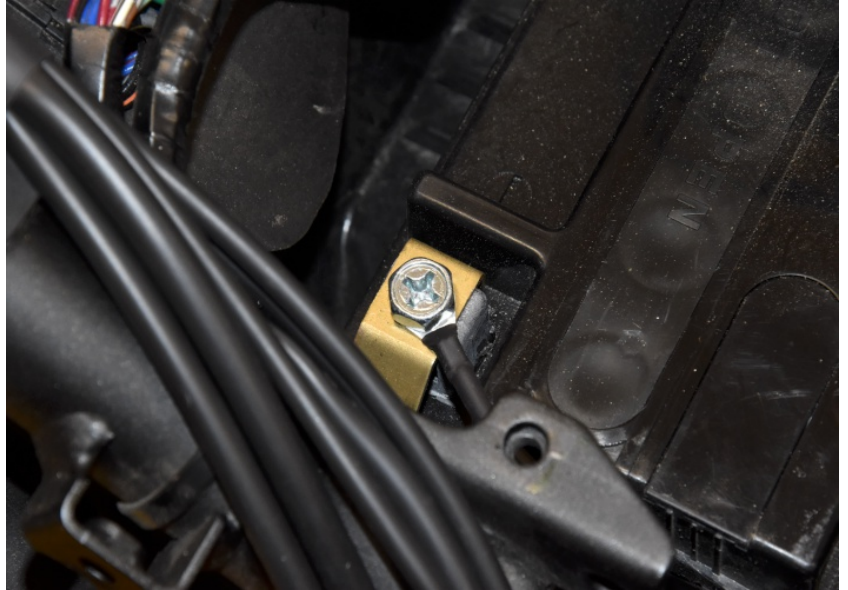

Mount the QSE sensor.

(Place the sensor in the rod as shown. Tighten the nut by hand fully and then by a 1/4 turn using a wrench but maximum to about 6 Nm.)



Typical position for the QuickShifter easy.

Secure the unit properly.

