QuickShifter easy Supplementary Manual



KTM 790 Duke 2018- (iQSE-1 + QSH-P2E)

Secure the bike on a stand.



Remove the seats.



Remove the fuel tank and the airbox.




QuickShifter easy Supplementary Manual



KTM 790 Duke 2018- (iQSE-1 + QSH-P2E)

Locate the ignition coil connectors.

(Black, 3-pole connectors under the fuel tank.)

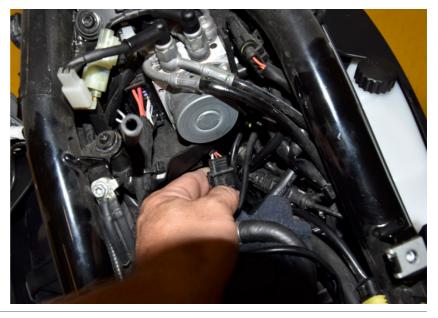


Connect the QSH connectors in-line with the ignition coil connectors.



Connect the QSH Black wire terminal to the battery negative terminal.

(The picture on the right shows an alternative location, but we recommend using the battery negative terminal)

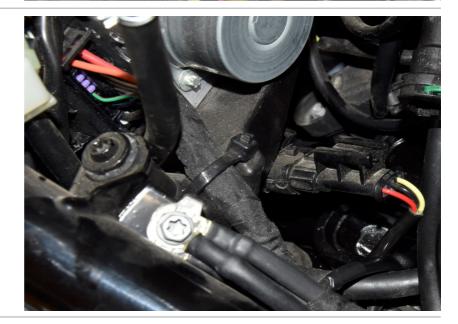


QuickShifter easy Supplementary Manual



KTM 790 Duke 2018- (iQSE-1 + QSH-P2E)

Mount the QSE sensor.

(Place the sensor in the rod without the supplied washers. Tighten the nut by hand fully and then by a 1/4 turn using a wrench but maximum to about 6 Nm.)

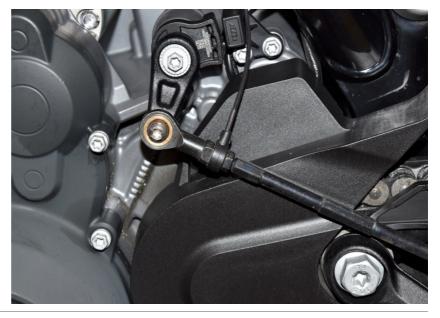

Typical position for the QuickShifter easy.

Secure the unit Properly.

