

QuickShifter easy Supplementary Manual



Kawasaki ZX-7R Ninja 1996-2003 (iQSE-1 + QSH-P2T)

Remove the main seat.



Lift up or remove the fuel tank.



Take off the Red wire terminal from one coil.

Connect the QSH Green terminal to this coil terminal.



QuickShifter easy Supplementary Manual



Kawasaki ZX-7R Ninja 1996-2003 (iQSE-1 + QSH-P2T)

Connect the Red terminal to the QSH Red wire terminal and secure with tape.



Take off the RED wire terminal from the 2nd coil.


Connect the QSH Green terminal to this coil terminal.

Isolate the unused Red wire terminal with tape.



Splice the QSH White wire to the Black/White wire of the Crankshaft Position Sensor connector by using the supplied red wire tap connector.

(Transparent, 3-pole connector on the right side)

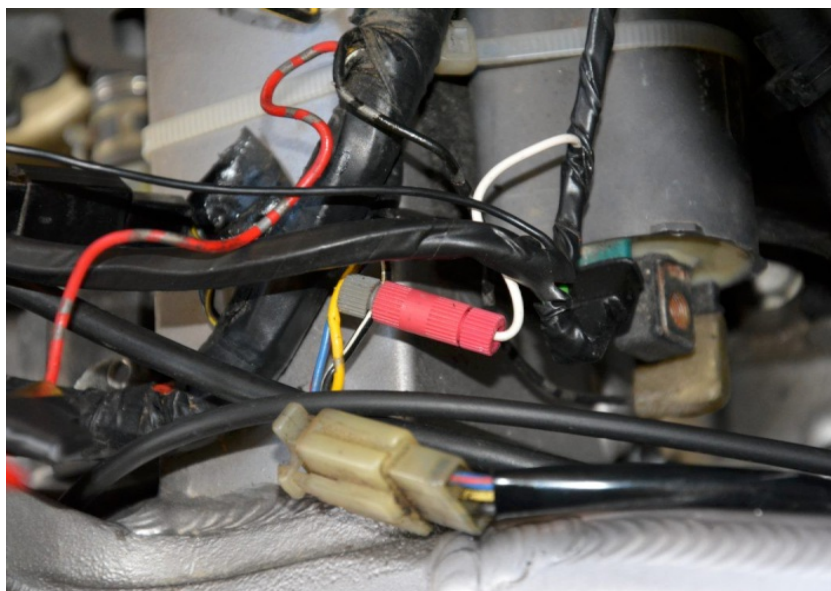


QuickShifter easy Supplementary Manual




Kawasaki ZX-7R Ninja 1996-2003 (iQSE-1 + QSH-P2T)

Connect the QSH Black wire terminal to the battery negative terminal.

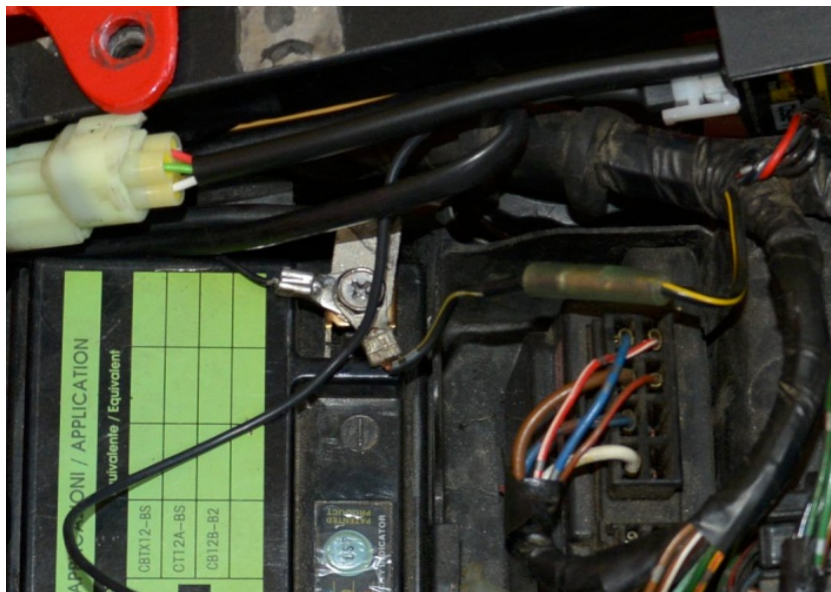

Mount the QSE sensor.

*(Replace the bolt with the one supplied.
Place the conical washers at the two sides
of the sensor like this: (O). Tighten the bolt
in this position by about 6 Nm. If you do not
have torque wrench, tighten the bolt until
the shift arm is tight on the gearbox shaft.)*

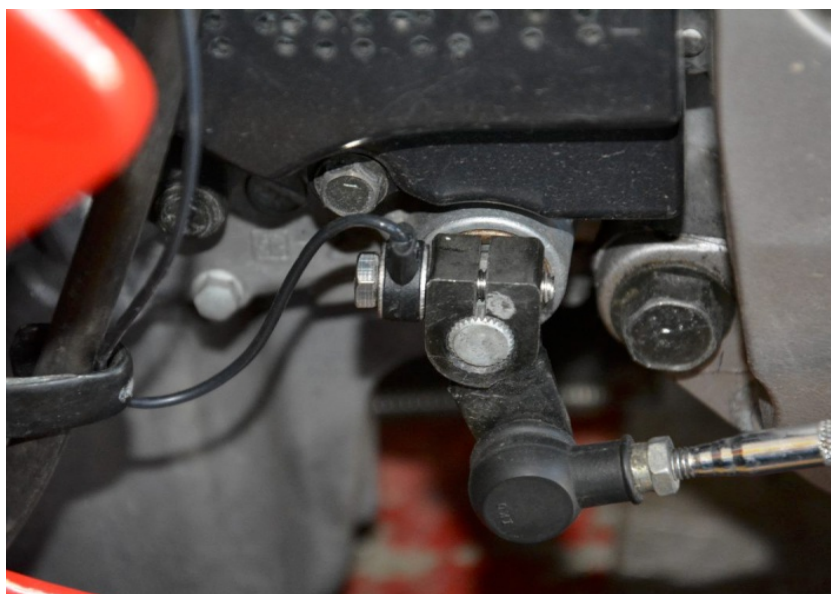

Typical position for the QuickShifter easy.

Secure the unit properly.

