# **QuickShifter easy** Supplementary Manual



### Kawasaki ZZR1100 1993-2001 (iQSE-1 + QSH-P2T)

Secure the bike on a stand.



Remove the seat.

Remove the fuel tank cover and remove the fuel tank.

Remove the airbox.



Locate the ignition coil terminals under the fuel tank on both sides.



## **QuickShifter easy** Supplementary Manual



#### Kawasaki ZZR1100 1993-2001 (iQSE-1 + QSH-P2T)

Take off the Red terminal from the coil.

Connect the Red terminal to the QSH Red wire terminal.

Connect the QSH Green terminal to this coil terminal.




Splice the QSH White wire to the Black wire of the coil by using the supplied red wire tap connector.



Take off the Red terminal from the other ignition coil.

Connect the QSH Green terminal to the empty ignition coil terminal.

Isolate the unused Red terminal with tape.

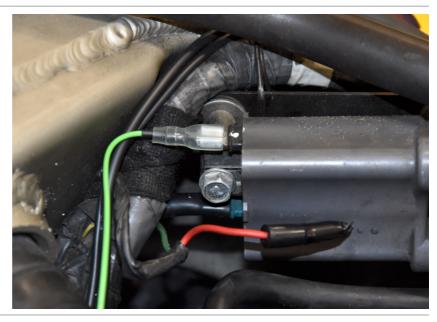

## **QuickShifter easy** Supplementary Manual



#### Kawasaki ZZR1100 1993-2001 (iQSE-1 + QSH-P2T)

Connect the QSH Black wire terminal to the battery negative terminal.



Mount the QSE sensor.

(Replace the bolt with the one supplied. Tighten the bolt in this position by about 6Nm. If you do not have torque wrench, tighten the bolt until the shift arm is tight on the gearbox shaft.)



Typical position for the QuickShifter easy.

Secure the unit properly.

