

QuickShifter easy Supplementary Manual

Yamaha FJR1300 ABS 2003-2012 (iQSE-W1 + QSH-P2T)

Secure the bike on a stand.




Remove the main seat.

Remove the fuel tank.



Locate the ignition coil connectors under the side panel on the right side.

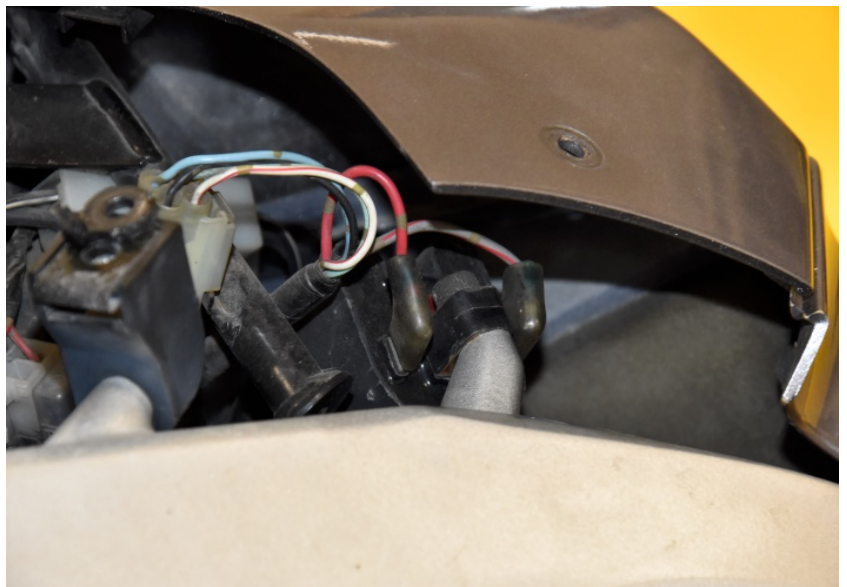

QuickShifter easy Supplementary Manual



Yamaha FJR1300 ABS 2003-2012 (iQSE-W1 + QSH-P2T)

Take off the Red/Black terminal from the coil.

Connect the Red/Black terminal to the QSH Red wire terminal.

Connect the QSH Green terminal to this coil terminal.

Splice the QSH White wire to the Grey/Red wire of the coil by using the supplied red wire tap connector.




Take off the Red/Black terminal from the other ignition coil.

Connect the QSH Green terminal to the empty ignition coil terminal.

Isolate the unused Red/Black terminal with tape.



Connect the QSH Black wire terminal to the battery negative terminal.

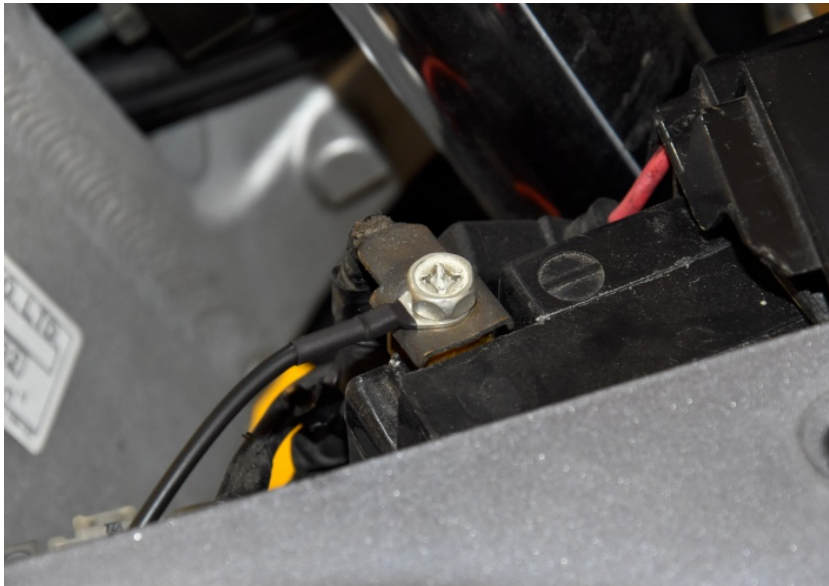

QuickShifter easy Supplementary Manual



Yamaha FJR1300 ABS 2003-2012 (iQSE-W1 + QSH-P2T)

Mount the QSE sensor.

(Place the sensor in the rod as shown.

Tighten the nut by hand fully and then by a 1/4 turn using a wrench but maximum to about 6 Nm.)



Typical position for the QuickShifter easy.

Secure the unit properly.

