

QuickShifter easy Supplementary Manual



Kawasaki ZX-14 ABS TC 2012- (iQSE-1 + QSH-P4A)

Secure the bike on a stand.



Remove the seat.

Remove the side fairings.

Remove the plastic cover from the fuel tank.

Remove the fuel tank.



Plug the QSH connectors in-line with the ignition coil connectors.



QuickShifter easy Supplementary Manual




Kawasaki ZX-14 ABS TC 2012- (iQSE-1 + QSH-P4A)

Connect the QSH Black wire terminal to the chassis ground.



Mount the QSE sensor.

(Replace the bolt with the one supplied. Place the supplied washers at both sides of the sensor. Tighten the bolt in this position by about 6 Nm. If you do not have torque wrench, tighten the bolt until the shift arm is tight on the gearbox shaft.)

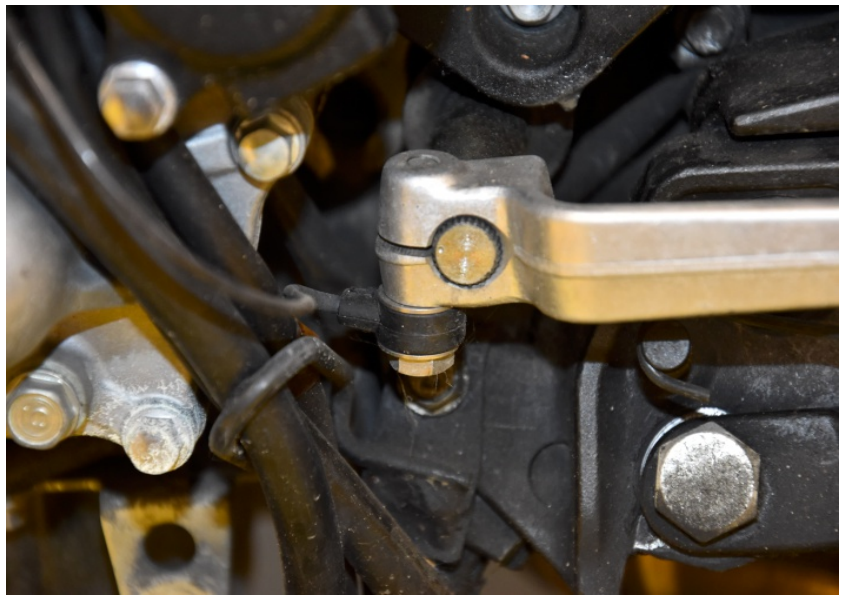

Typical position for the QuickShifter easy.

Secure the unit properly.

