

Honda CBR1000RR 2006-2007 (iQSE-1 + QSH-P4B)

Remove the main seat.



Remove the black side covers from the
fuel tank cover.

Remove the fuel tank cover.



Remove the fuel tank.




QuickShifter easy Supplementary Manual



Honda CBR1000RR 2006-2007 (iQSE-1 + QSH-P4B)

Remove the airbox.

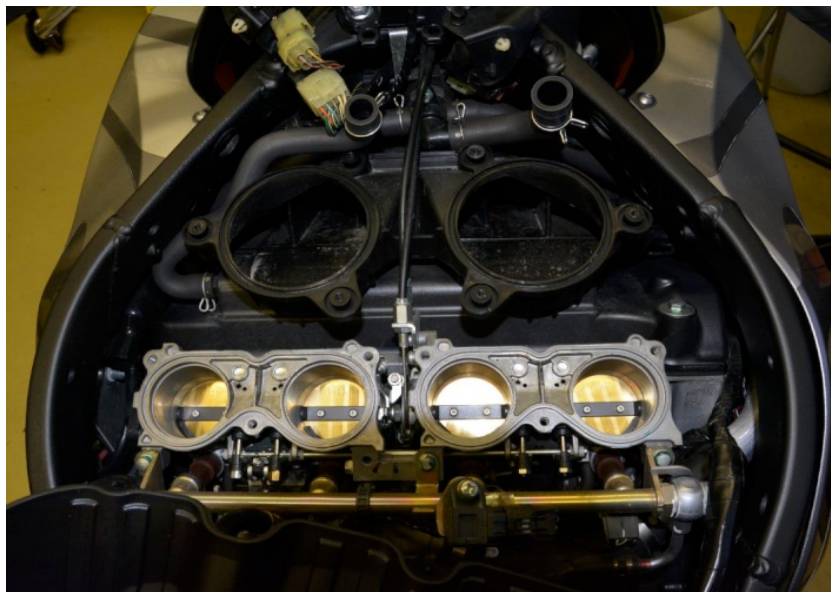


Remove the air intake below the airbox.



Plug the QSH connectors in-line with the
ignition coil connectors.

*(Black, 2-pole connectors below the air
intake)*

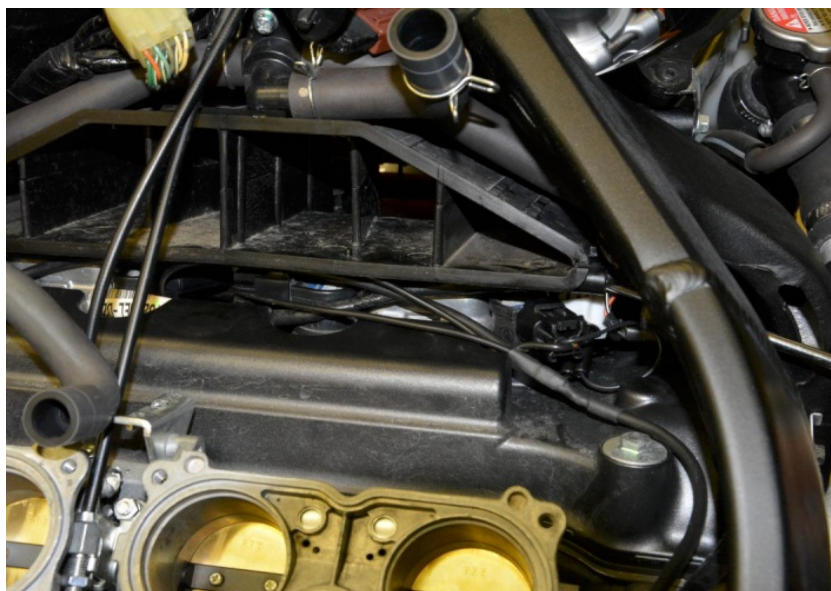

QuickShifter easy Supplementary Manual



Honda CBR1000RR 2006-2007 (iQSE-1 + QSH-P4B)

Connect the QSH Black wire terminal to the chassis ground.



Mount the QSE sensor.

*(Replace the bolt with the one supplied.
Place the conical washers at the two sides
of the sensor like this: (O). Tighten the bolt
in this position by about 6 Nm. If you do not
have torque wrench, tighten the bolt until
the shift arm is tight on the gearbox shaft.)*



Typical position for the QuickShifter easy.

Secure the unit properly.

