

QuickShifter easy Supplementary Manual



Triumph Speed Triple ABS 2011- (iQSE-1 + QSH-P4B)

Secure the bike on a stand.




Remove the seat.



Remove the fuel tank.

Remove the battery and the airbox.

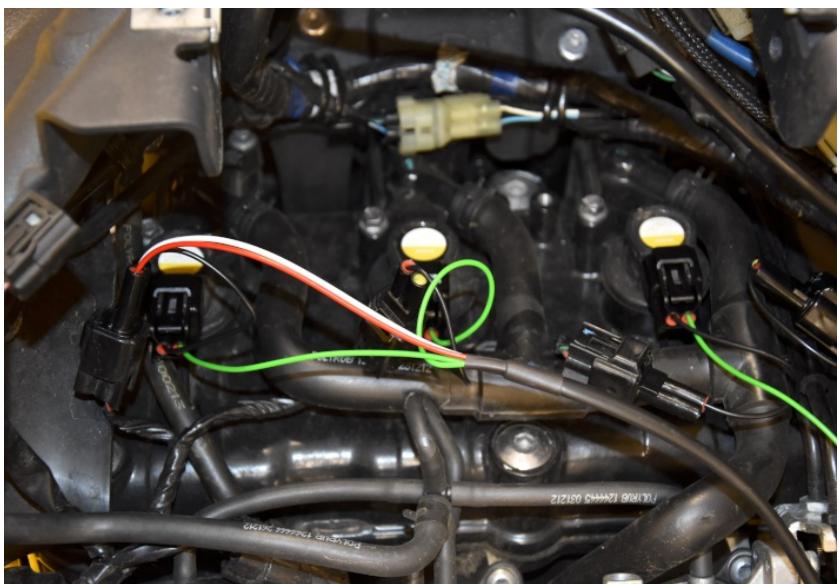

Plug the QSH connectors in-line with the ignition coil connectors.

(Make sure the QSH plugs marked with RED square are connected, and leave one coupler unused)

QuickShifter easy

Supplementary Manual



Triumph Speed Triple ABS 2011- (iQSE-1 + QSH-P4B)

Connect the QSH Black wire terminal to the battery negative terminal.

(The picture on the right shows an alternative location, but we recommend using the battery negative terminal)



Mount the QSE sensor.

(Place the sensor in the rod as shown. Tighten the nut by hand fully and then by a 1/4 turn using a wrench but maximum to about 6 Nm.)



Typical position for the QuickShifter easy.

Secure the unit properly.

