

# QuickShifter easy

## Supplementary Manual



### Triumph Trophy SE ABS TC 2012-2020 (iQSE-W1 + QSH-P4B)

Secure the bike on a stand.



Remove the seats.

Remove the fuel tank cover.


Remove the front and side fairings.

Remove the fuel tank and remove the airbox.



Plug the QSH connectors in-line with the ignition coil connectors.

*(Make sure the QSH plugs marked with RED square are connected, and leave one coupler unused)*

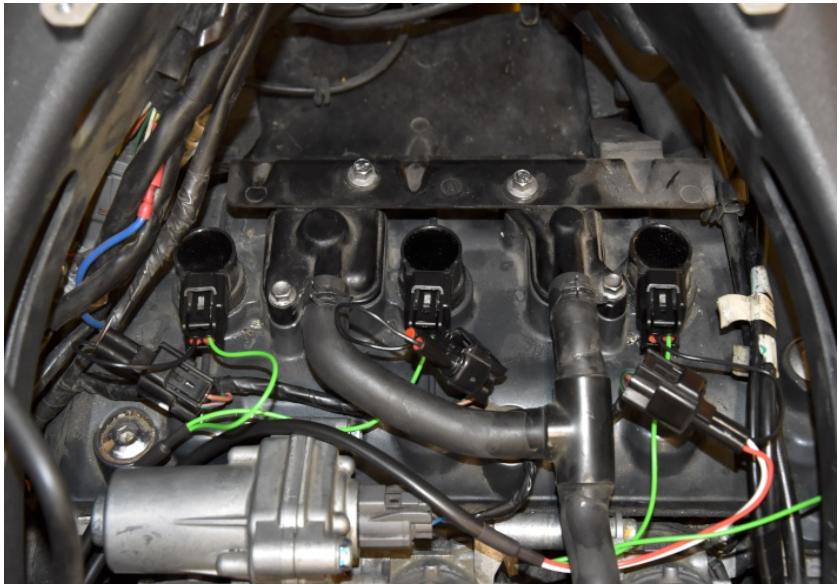

# QuickShifter easy


## Supplementary Manual



### Triumph Trophy SE ABS TC 2012-2020 (iQSE-W1 + QSH-P4B)

Connect the QSH Black wire terminal to the battery negative terminal.

*(The picture on the right shows an alternative location, but we recommend using the battery negative terminal)*

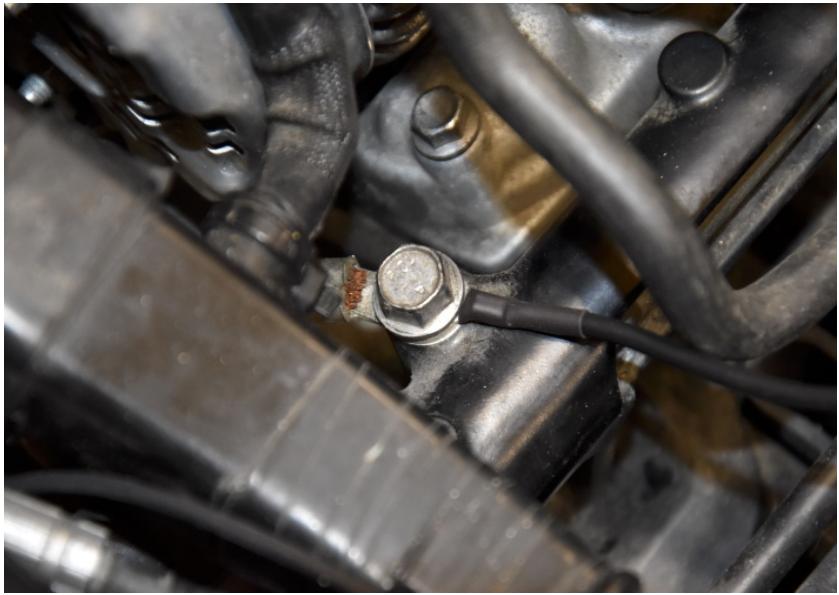

Mount the QSE sensor.

*(Replace the bolt with the one supplied. Tighten the bolt in this position by about 6 Nm. If you do not have torque wrench, tighten the bolt until the shift arm is tight on the gearbox shaft.)*



Typical position for the QuickShifter easy.

Secure the unit properly.

