

# QuickShifter easy Supplementary Manual

## Honda CRF300L ABS 2021- (iQSE-W1 + QSX-F2A)

Secure the bike on a stand.



Remove the seat.

Remove the side fairings.

Remove the fuel tank.



Locate the fuel injector connectors under  
the fuel tank.

*(Grey, 2-pole connectors)*




# QuickShifter easy Supplementary Manual




## Honda CRF300L ABS 2021- (iQSE-W1 + QSX-F2A)

Connect the QSX connectors in-line with the fuel injector connectors.

*(Make sure the QSX plugs marked with RED square are connected, and leave the other one coupler unused)*

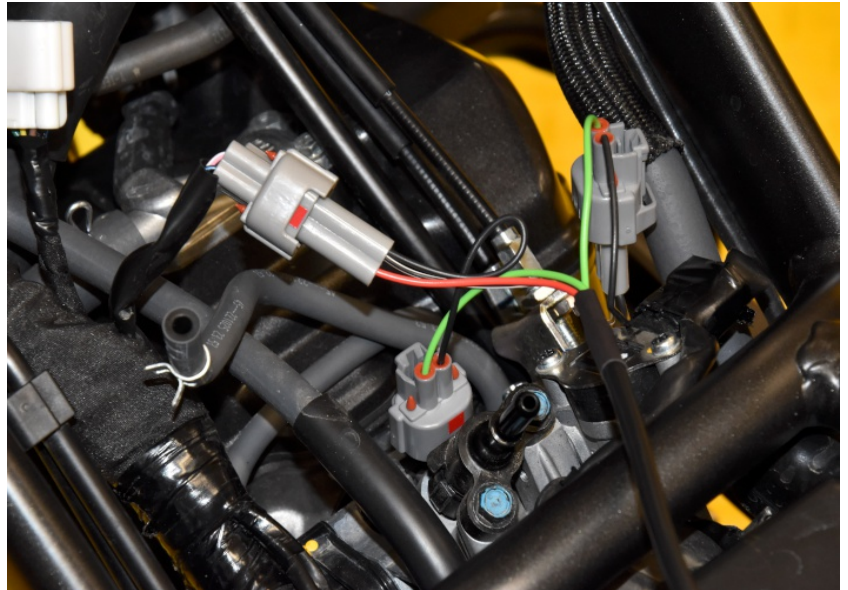


Connect the QSX Black wire terminal to the battery negative terminal.

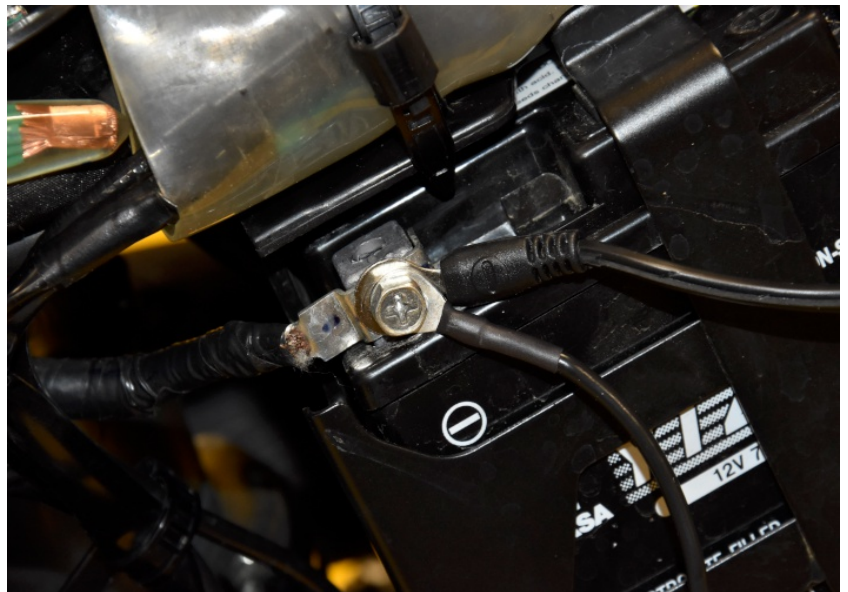

Mount the QSE sensor.

*(Replace the bolt with the one supplied. Tighten the bolt in this position by about 6 Nm. If you do not have a torque wrench, tighten the bolt until the shift arm is tight on the gearbox shaft.)*

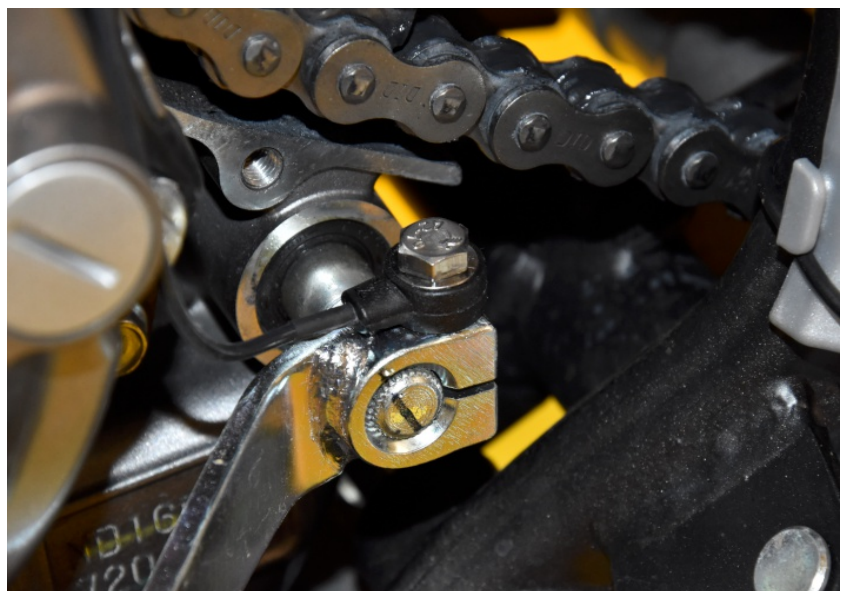

# QuickShifter easy Supplementary Manual



## Honda CRF300L ABS 2021- (iQSE-W1 + QSX-F2A)

Typical position for the QuickShifter easy.

Secure the unit properly.

