

QuickShifter easy Supplementary Manual



Suzuki DL1000 V-Strom 2014-2020 (iQSE-1 + QSX-F2A)

Remove the seat.

Remove the side fairings.



Remove the fuel tank.

Remove the airbox.



Plug the QSX connectors in-line with the
fuel injector connectors.

*(Brown and grey, 2-pole connectors bellow
the airbox)*



QuickShifter easy Supplementary Manual




Suzuki DL1000 V-Strom 2014-2020 (iQSE-1 + QSX-F2A)

Connect the QSX Black wire terminal to the chassis ground.



Mount the QSE sensor.

*(Replace the bolt with the one supplied.
Place the conical washers at the two sides
of the sensor like this: (O). Tighten the bolt
in this position by about 6 Nm. If you do not
have torque wrench, tighten the bolt until
the shift arm is tight on the gearbox shaft.)*

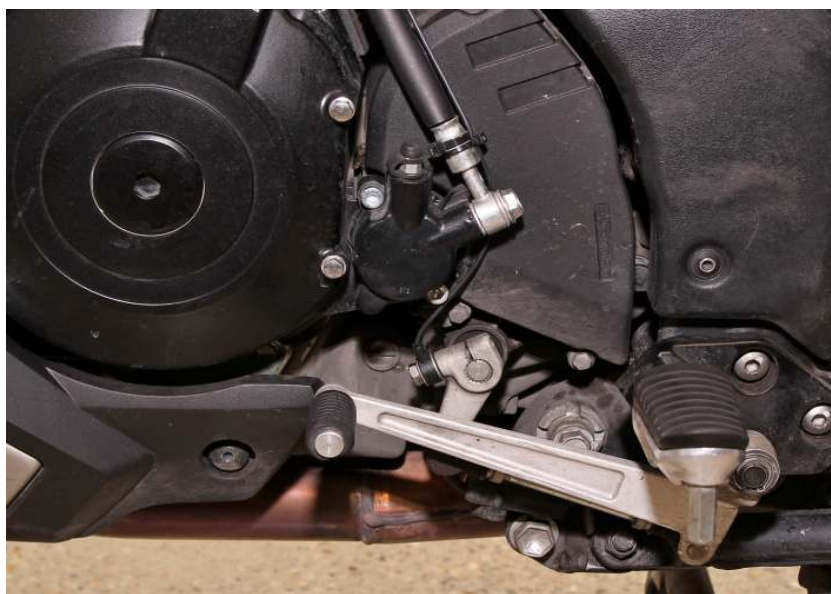

Typical position for the QuickShifter easy.

Secure the unit properly.

