

# QuickShifter easy Supplementary Manual



## Suzuki DL1000 V-Strom 2014-2020 (iQSE-1 + QSX-F2A)

Remove the seat.

Remove the side fairings.



Remove the fuel tank.

Remove the airbox.



Plug the QSX connectors in-line with the  
fuel injector connectors.

*(Brown and grey, 2-pole connectors bellow  
the airbox)*



# QuickShifter easy Supplementary Manual



## Suzuki DL1000 V-Strom 2014-2020 (iQSE-1 + QSX-F2A)


Connect the QSX Black wire terminal to the battery negative terminal.

*(The picture on the right shows an alternative location, but we recommend using the battery negative terminal)*



Mount the QSE sensor.

*(Replace the bolt with the one supplied. Place the supplied washers at both sides of the sensor. Tighten the bolt in this position by about 6 Nm. If you do not have torque wrench, tighten the bolt until the shift arm is tight on the gearbox shaft.)*

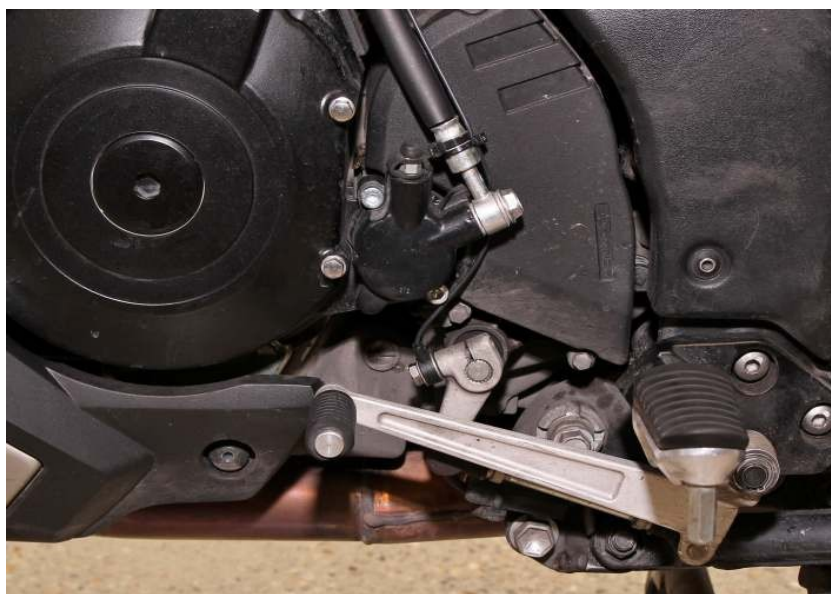

Typical position for the QuickShifter easy.

Secure the unit properly.

