QuickShifter easy Supplementary Manual



Kawasaki Z900 2017- (iQSE-1 + QSX-P4A)

Secure the bike on a stand.



Remove the seats.



Remove the side covers and the fuel tank.




QuickShifter easy Supplementary Manual



Kawasaki Z900 2017- (iQSE-1 + QSX-P4A)

Connect the QSX connectors in-line with the ignition coil connectors.

(Black, 2-pole connectors below the fuel tank.)

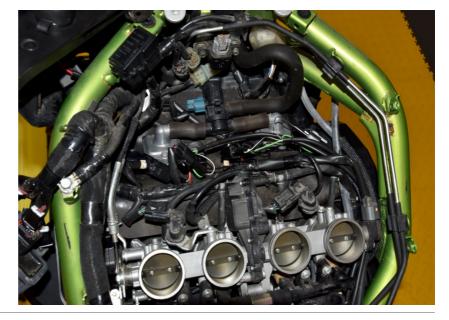


Connect the QSX Black wire terminal to the battery negative terminal.

(The picture on the right shows an alternative location, but we recommend using the battery negative terminal)



Secure the QSX module unit.

(Avoid direct contact with heat sources, like the cylinder head.)

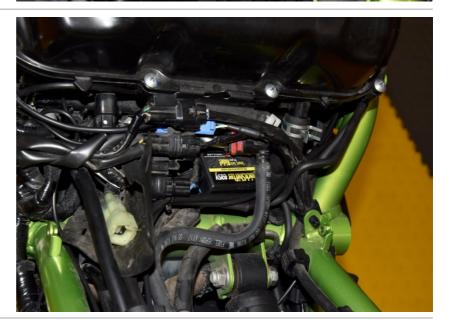

QuickShifter easy Supplementary Manual



Kawasaki Z900 2017- (iQSE-1 + QSX-P4A)

Mount the QSE sensor.

(Replace the bolt with the one supplied.

Place the supplied washers at both sides of the sensor. Tighten the bolt in this position by about 6 Nm. If you do not have torque wrench, tighten the bolt until the shift arm is tight on the gearbox shaft.)



Typical position for the QuickShifter easy.

Secure the unit properly.

