

QuickShifter easy Supplementary Manual



Suzuki GSX-R1000 2007-2008 (iQSE-1 + QSX-P4B)


Remove the main seat.



Remove the black fuel tank covers.



Remove the fuel tank.

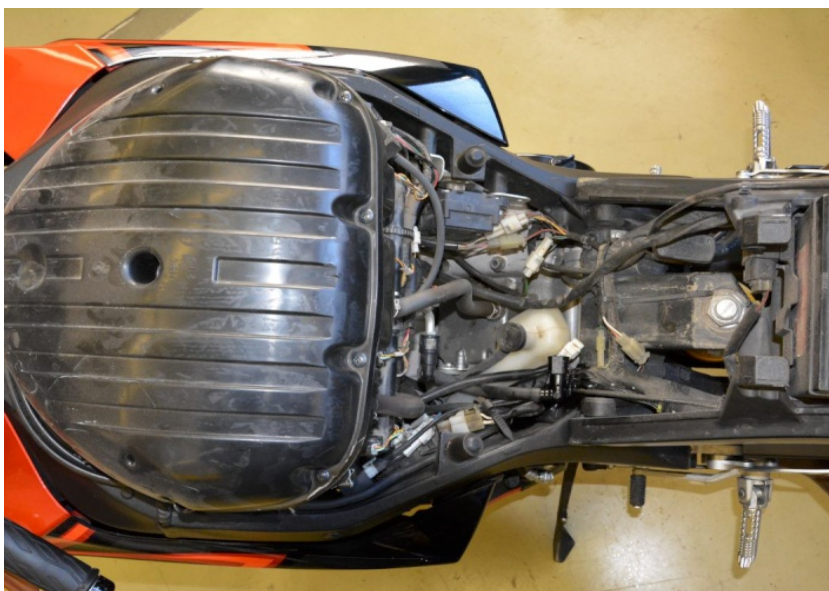

QuickShifter easy Supplementary Manual



Suzuki GSX-R1000 2007-2008 (iQSE-1 + QSX-P4B)

Remove the airbox.



Plug the QSX connectors in-line with the ignition coil connectors.

(Black, 2-pole connectors below the airbox)



Mount the QSX module to the inner side of the frame by the supplied Velcro strips, and secure the cables with cable ties.

(Avoid direct contact with heat sources, like the cylinder head.)



QuickShifter easy Supplementary Manual



Suzuki GSX-R1000 2007-2008 (iQSE-1 + QSX-P4B)

Connect the QSX Black wire terminal to the battery negative terminal.

(The picture on the right shows an alternative location, but we recommend using the battery negative terminal)



Mount the QSE sensor.

(Replace the bolt with the one supplied. Place the supplied washers at both sides of the sensor. Tighten the bolt in this position by about 6 Nm. If you do not have torque wrench, tighten the bolt until the shift arm is tight on the gearbox shaft.)



Typical position for the QuickShifter easy.

Secure the unit properly.

