

SpeedoHealer CAN

Supplementary Manual



Aprilia Tuareg 660 ABS TC 2022- (SH-CAN)

Secure the bike on a stand.



Remove the seat.



Locate the ABS connector under the fuel tank.



SpeedoHealer CAN

Supplementary Manual



Aprilia Tuareg 660 ABS TC 2022- (SH-CAN)

Cut the Yellow wire about 2,5cm (1") of the connector. (Pin #2)

Connect the SH Green wire to the Yellow wire end, which goes to the ABS module. Use a yellow butt connector.




Connect the SH Blue wire to the Yellow wire end, which is at the wiring harness side. Use a yellow butt connector.



Cut the White wire about 2,5cm (1") of the connector. (Pin #11)

Connect the SH White wire to the White wire end, which goes to the ABS module. Use a yellow butt connector.

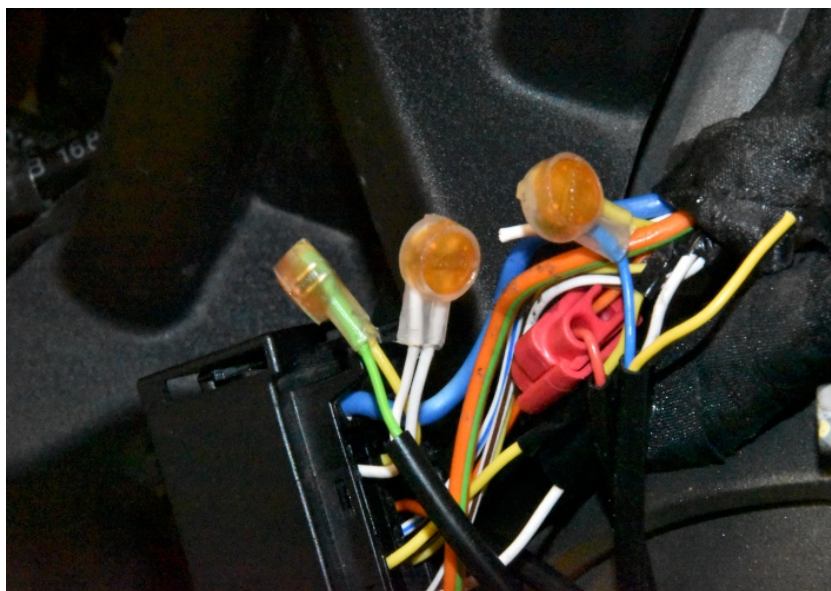


SpeedoHealer CAN

Supplementary Manual




Aprilia Tuareg 660 ABS TC 2022- (SH-CAN)


Connect the SH Yellow wire to the White wire end, which is at the wiring harness side. Use a yellow butt connector.

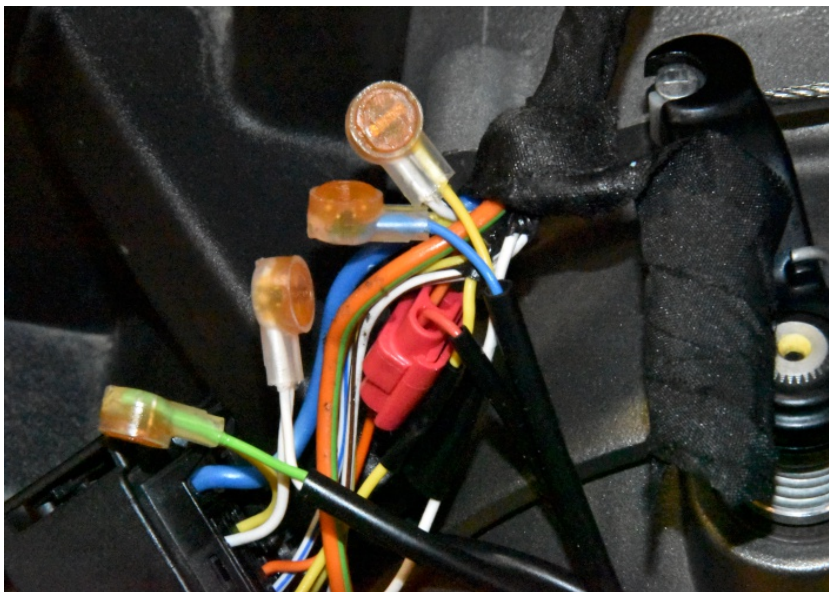

Splice the SH Red wire to the Orange/Red wire of the ABS connector. Use a red wire tap connector.

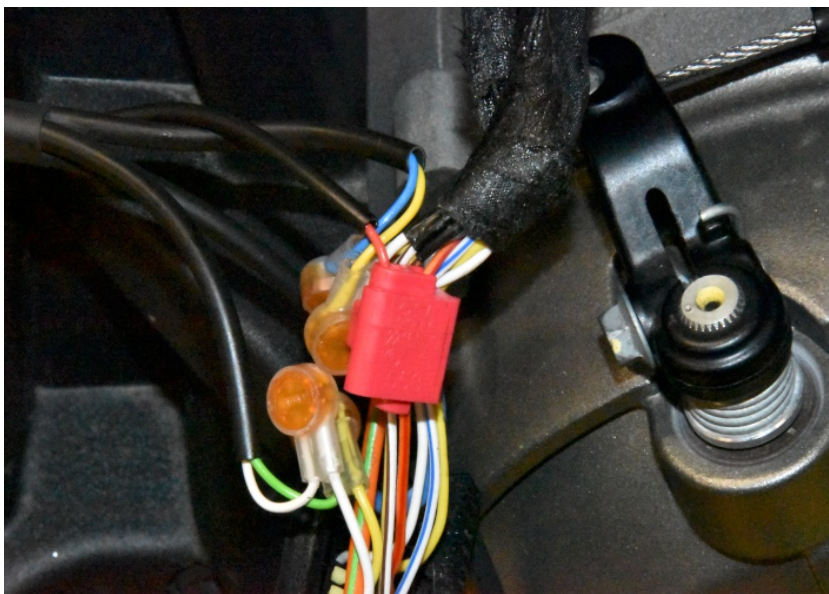

Splice the SH Black wire to the Black wire of the fuel pump connector. Use a red wire tap connector.

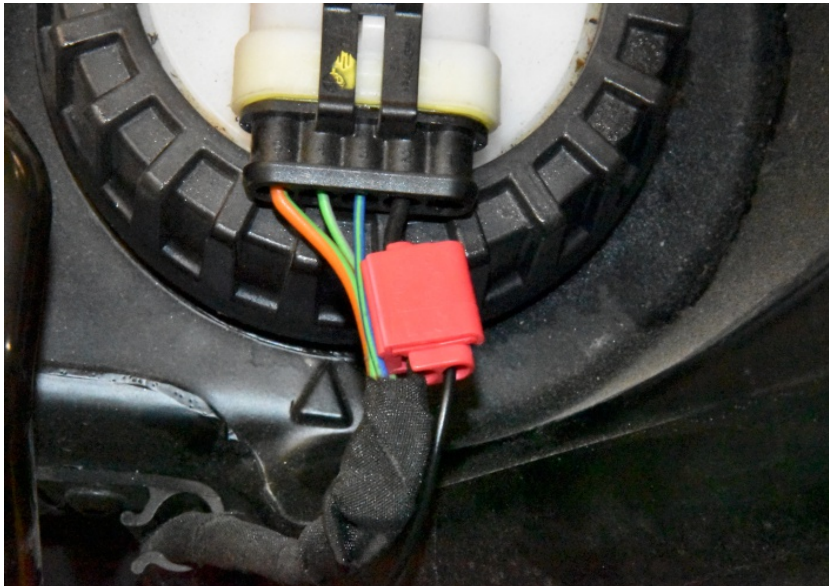

SpeedoHealer CAN

Supplementary Manual



Aprilia Tuareg 660 ABS TC 2022- (SH-CAN)

Typical position for the SpeedoHealer CAN.

Secure the unit properly.

