

SpeedoHealer CAN Supplementary Manual



Triumph Tiger Sport 660 ABS 2022- (SH-CAN)

Secure the bike on a stand.



Remove the seat.

Remove the plastic covers from the fuel tank.


Remove the fuel tank.



Locate the ABS connector under the fuel tank.

Cut the Red wire about 2,5cm (1") of the connector.

Connect the SH Green wire to the Red wire end, which goes to the ABS module. Use a yellow butt connector.

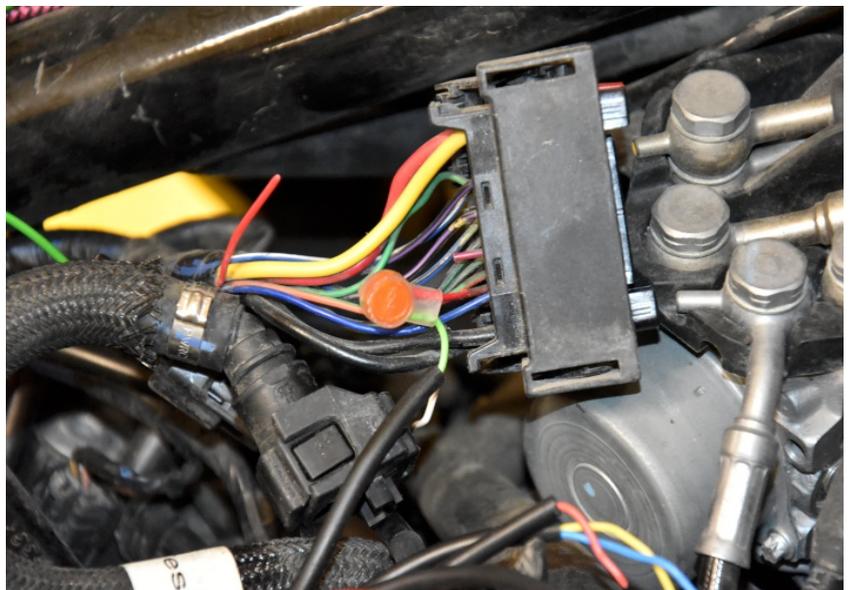

SpeedoHealer CAN Supplementary Manual



Triumph Tiger Sport 660 ABS 2022- (SH-CAN)

Connect the SH Blue wire to the Red wire end, which is at the wiring harness side. Use a yellow butt connector.




Cut the Blue wire about 2,5cm (1") of the connector.

Connect the SH White wire to the Blue wire end, which goes to the ABS module. Use a yellow butt connector.



Connect the SH Yellow wire to the Blue wire end, which is at the wiring harness side. Use a yellow butt connector.

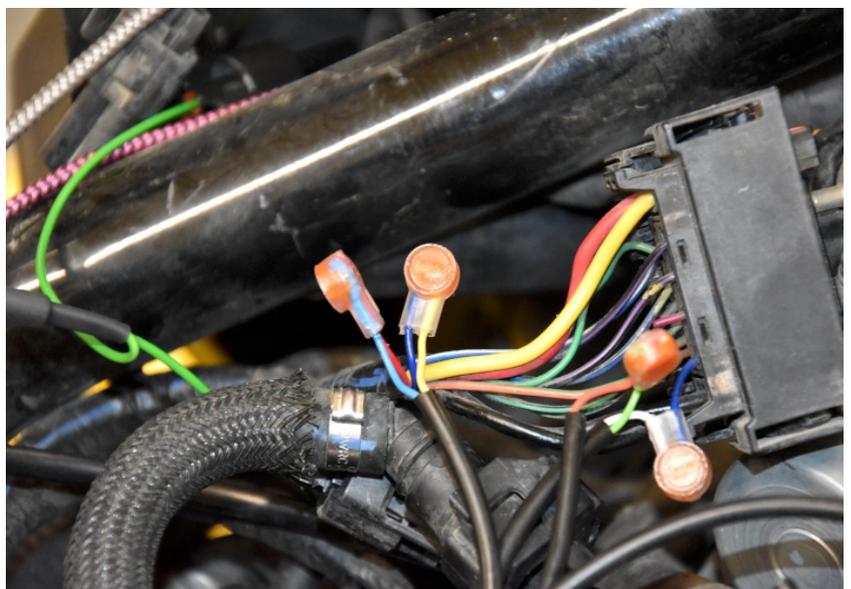


SpeedoHealer CAN Supplementary Manual



Triumph Tiger Sport 660 ABS 2022- (SH-CAN)

Splice the SH Red wire to the Green wire of the ABS connector. Use a red wire tap connector.

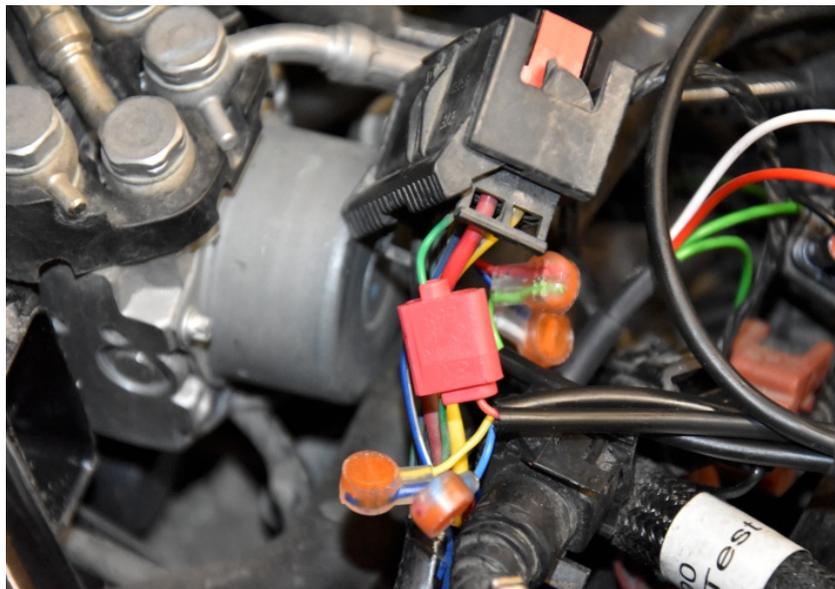

Splice the SH Black wire to the Black wire of the fuel pump connector. Use a red wire tap connector.

