

Honda MSX125 non-ABS 2013-2020 (SH-V4 + SH-H09)

Secure the bike on a stand.




Remove the seat.

Remove the side fairings.



Locate the vehicle speed sensor connectors.

(Transparent, 3-pole connectors and black, 1-pole connectors in a dust boot at the left side below the fuel tank)

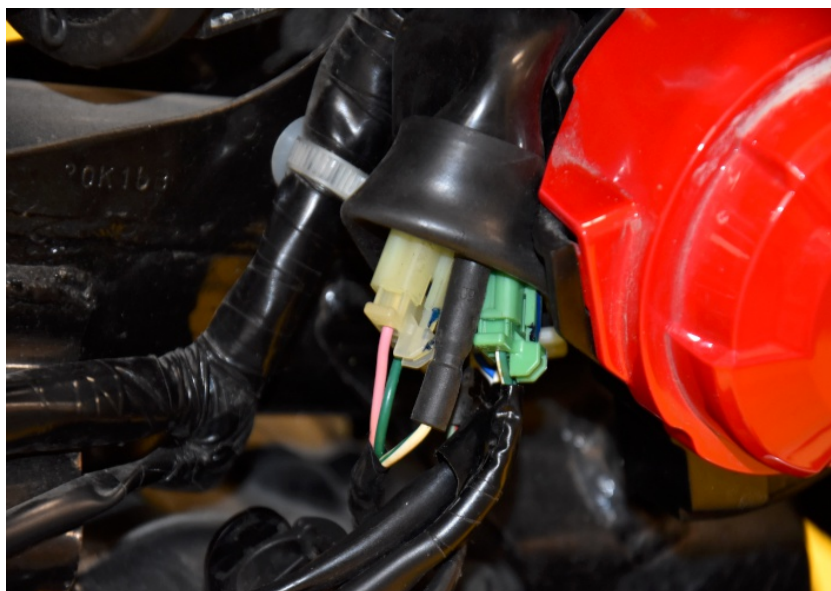


SpeedoHealer Supplementary Manual



Honda MSX125 non-ABS 2013-2020 (SH-V4 + SH-H09)

Plug the SpeedoHealer connectors in-line with the vehicle speed sensor connectors.

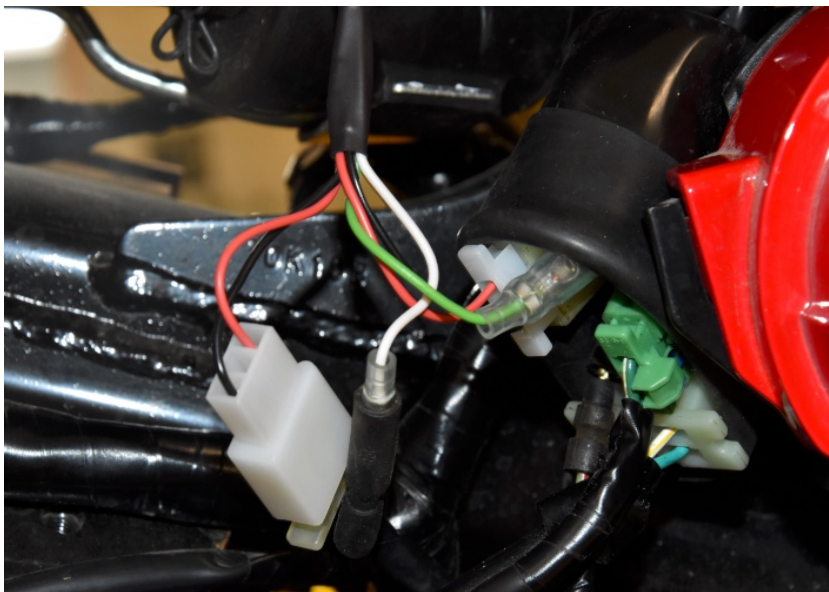

Typical position for the remote button.



Typical position for the SpeedoHealer.

Secure the unit properly.

