

Honda MSX125 ABS Grom 2017-2020 (SH-V4 + SH-H11)

Remove the fairing and the frame cover under the seat at the left side.




Locate the speed sensor connectors in the dust boot and disconnect it.

(Transparent, 3-pole connector with Green and Pink wire and 1-pole connector with White/Green wire.)



Plug the SpeedoHealer connectors in-line with the vehicle speed sensor connectors.

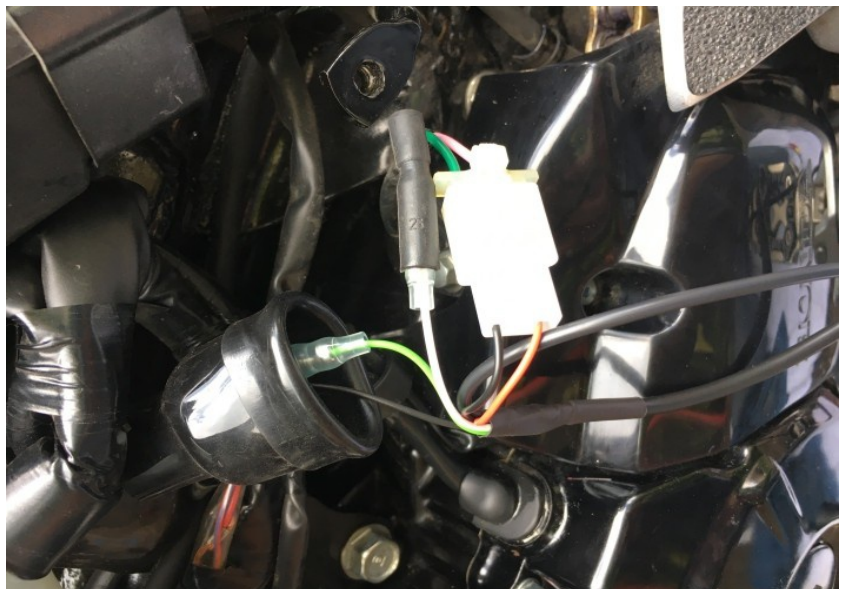

SpeedoHealer

Supplementary Manual



Honda MSX125 ABS Grom 2017-2020 (SH-V4 + SH-H11)

Plug the SH power lead (Red wire) in-line with the 1-pole plugs of the Black wire of the rear brake light switch.



Wrap the wires and cables with black tape neatly.



Typical position for the SpeedoHealer.

Secure the unit properly.

