

Kawasaki Z300 ABS 2015-2016 (SH-V4 + SH-K01)

Secure the bike on a stand.



Remove the black plastic covers under the main seat.

Remove the seats.


Remove the black covers from the fuel tank.

Remove the fuel tank.



Locate the vehicle speed sensor connectors.

(Black, 3-pole connectors under the fuel tank)

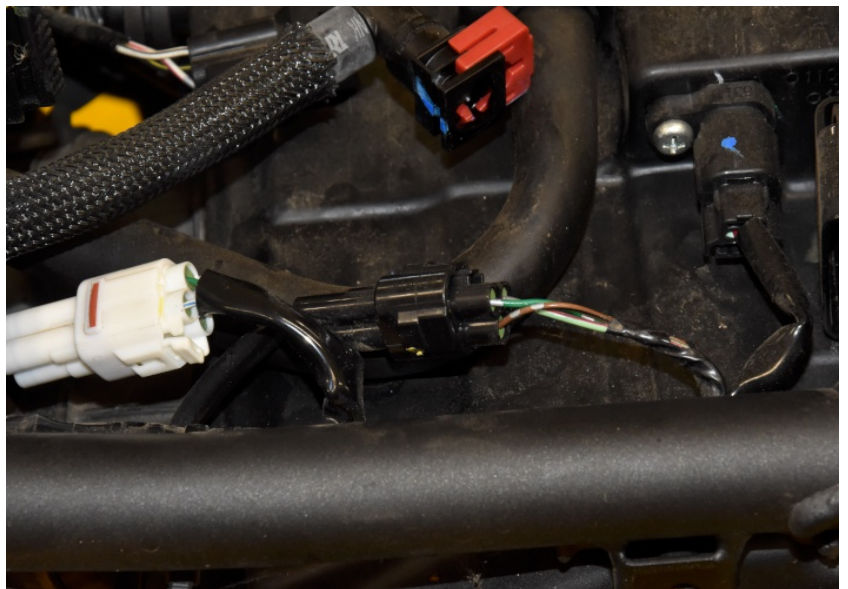


SpeedoHealer Supplementary Manual



Kawasaki Z300 ABS 2015-2016 (SH-V4 + SH-K01)

Plug the SpeedoHealer connectors in-line with the vehicle speed sensor connectors.

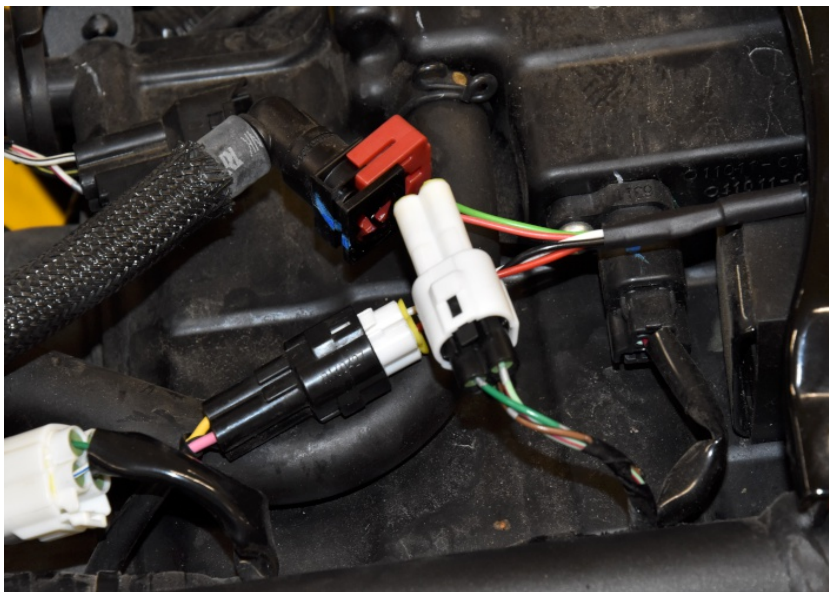

Typical position for the remote button.



Typical position for the SpeedoHealer.

Secure the unit properly.

