


Kawasaki ZX-6R Ninja 2009-2012 (SH-V4 + SH-K01)

Remove the black frame covers below the fuel tank.


Remove the main seat.



Remove or lift up the fuel tank.

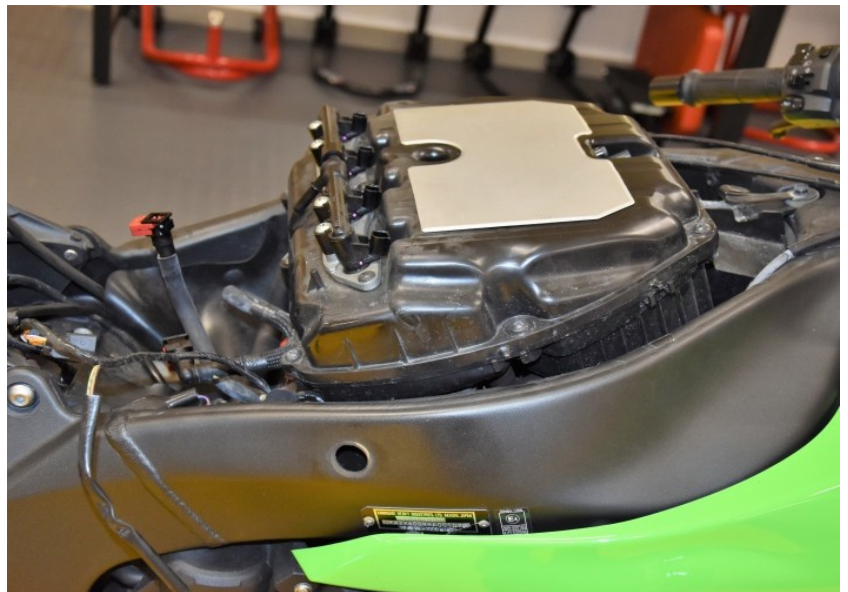

Plug the SpeedoHealer connectors in-line with the vehicle speed sensor connectors.

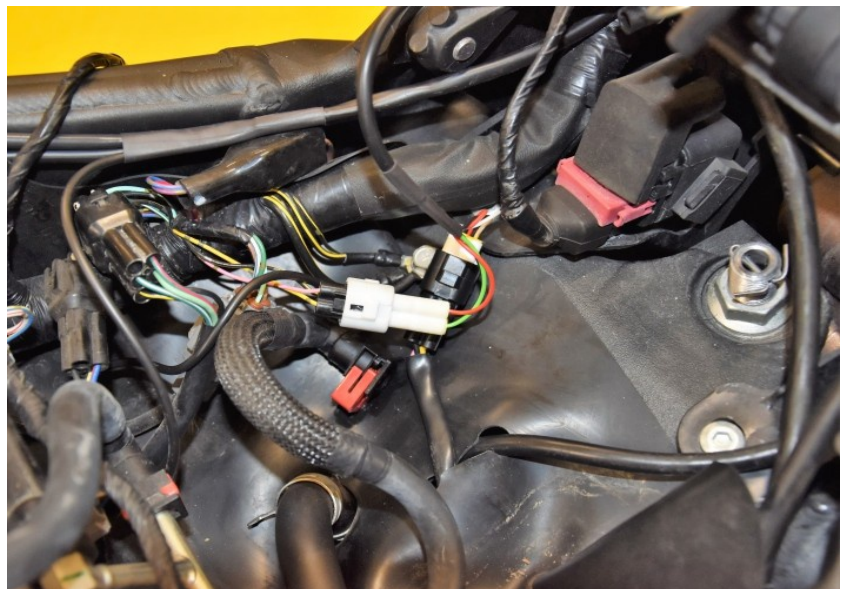

Kawasaki ZX-6R Ninja 2009-2012 (SH-V4 + SH-K01)

Typical position for the SpeedoHealer.

Secure the unit properly.

