

Kawasaki Vulcan 900 2006- (SH-V4 + SH-K06)


Remove the seat.

Remove the left frame cover below the main seat.



Plug the SpeedoHealer connectors in-line with the vehicle speed sensor connectors.

(Black, 3-pole connectors located between the engine block and the frame)

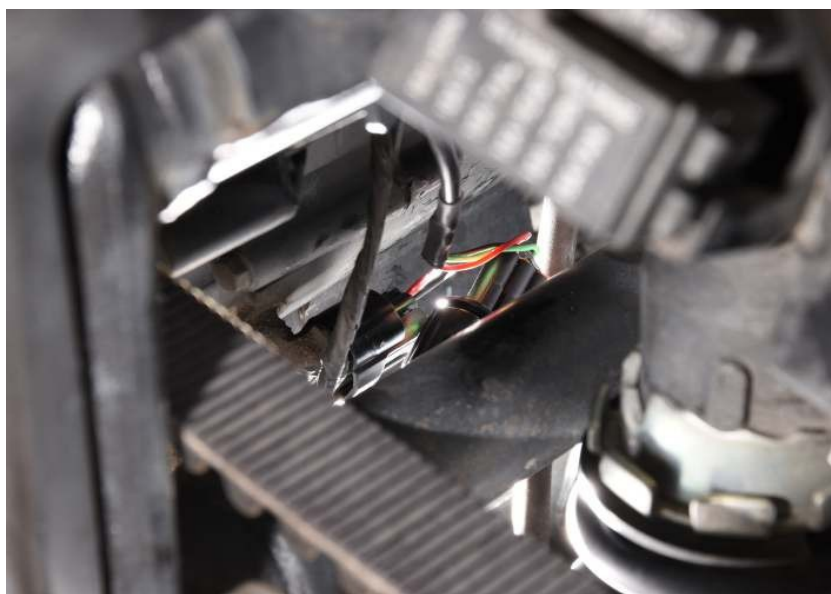

Typical position for the remote button.



SpeedoHealer Supplementary Manual



Kawasaki Vulcan 900 2006- (SH-V4 + SH-K06)

Typical position for the SpeedoHealer.

Secure the unit properly.

