

Triumph Tiger 800 2010-2014 (SH-V4 + SH-T02)

Secure the bike on a stand.




Remove the seats and the side fairings.

Remove the fuel tank and the airbox.



Plug the SpeedoHealer connectors in-line with the vehicle speed sensor connectors.

(Black, 3-pole connectors below the airbox)

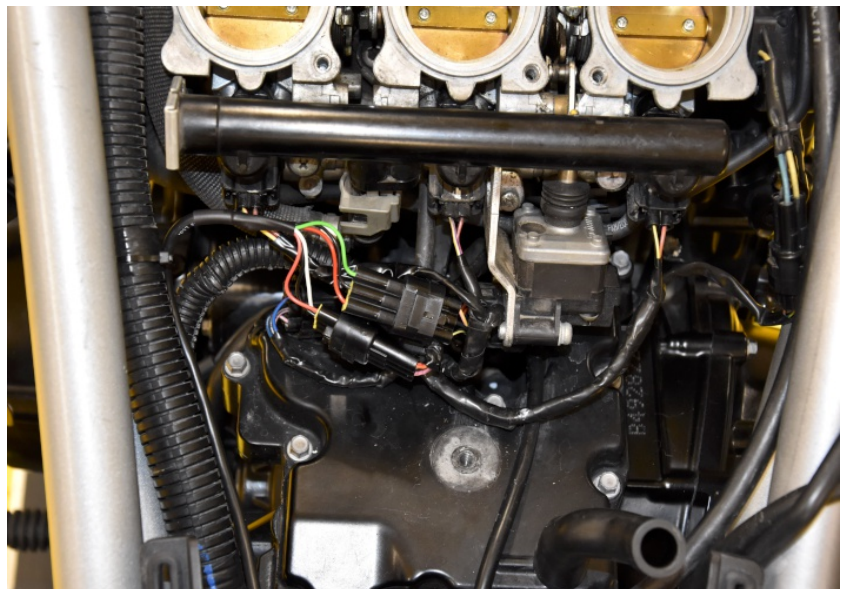

Triumph Tiger 800 2010-2014 (SH-V4 + SH-T02)

Typical position for remote button.



Typical position for the SpeedoHealer.

Secure the unit properly.

